

Aura Illuminated Wooden Ring Pendant

FIXTURE TYPE: _____

PROJECT NAME: _____



Solid wood exterior/interior LED round pendant.

FEATURES:

- Available in 2' to 6' diameters
- Smooth, dot free illumination
- Dimmable IP65 power supply and IP67 luminaire
- Catenary cable and ceiling mounting options

SPECIFICATIONS:

HOUSING: Solid Accoya wood linear assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, waterproof, and rated for wet or dry use exposure.

ELECTRICAL: Powered by a 100-305V primary/24V DC secondary remote dimmable power supply. Driver features built-in short circuit, over temperature, over voltage, and over current. System is 0-10V dimming down to 8%. Catenary mounted fixtures supplied with 1' infeed cable. A 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6' infeed cable. Constructed with a US and Canada UL listed luminaire.


OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination. Consult factory for other lumen outputs. Operating temperature of -40°F to 131°F.

FINISHES AND MATERIALS: Wood is finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors.


HARDWARE: All fasteners and non-wood components are stainless steel.

WARRANTY: 25-year wood warranty with a 5-year finish warranty. 3-year warranty on LED and driver.

Aura Ring - Direct Lighting

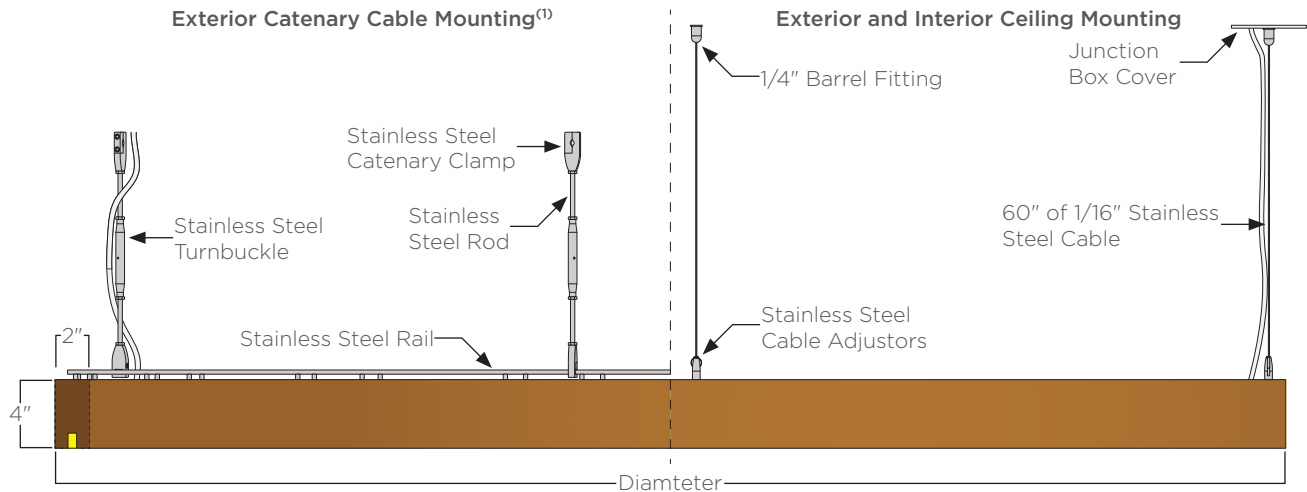

Dia.	Watts	Lumens	Weight ⁽²⁾	EPA ⁽²⁾
2'	23	720	17lbs.	.69ft ²
3'	35	1120	25lbs.	.95ft ²
4'	47	1480	32lbs.	1.24ft ²
5'	58	1840	41lbs.	1.52ft ²
6'	70	2240	47lbs.	1.81ft ²

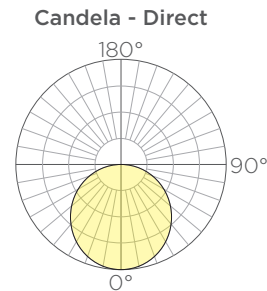


ORDERING GUIDE: EXAMPLE: AURA-RNG-D-6-L2750-S4-CA-STD



1	Series	4	Diameter	6	Output	8	Mounting
AURA	Aura	2	2'	SO	Standard Output	CA	Catenary Cable
2	Series	3	3'	7	Wood Finish	CE	Ceiling Canopy
RNG	Ring	4	4'	S*	See color options on finishes technical sheet	9	Special
3	Lighting	5	5'			STD	Standard
D	Direct	6	6'			MOD	Modified
		L27	2700K				
		L30	3000K				
		L35	3500K				
		L40	4000K				


1. Catenary cable designed and provided by others.
2. Weight and EPA based off of catenary mounting option.

Aura Ring - Direct/Indirect Lighting

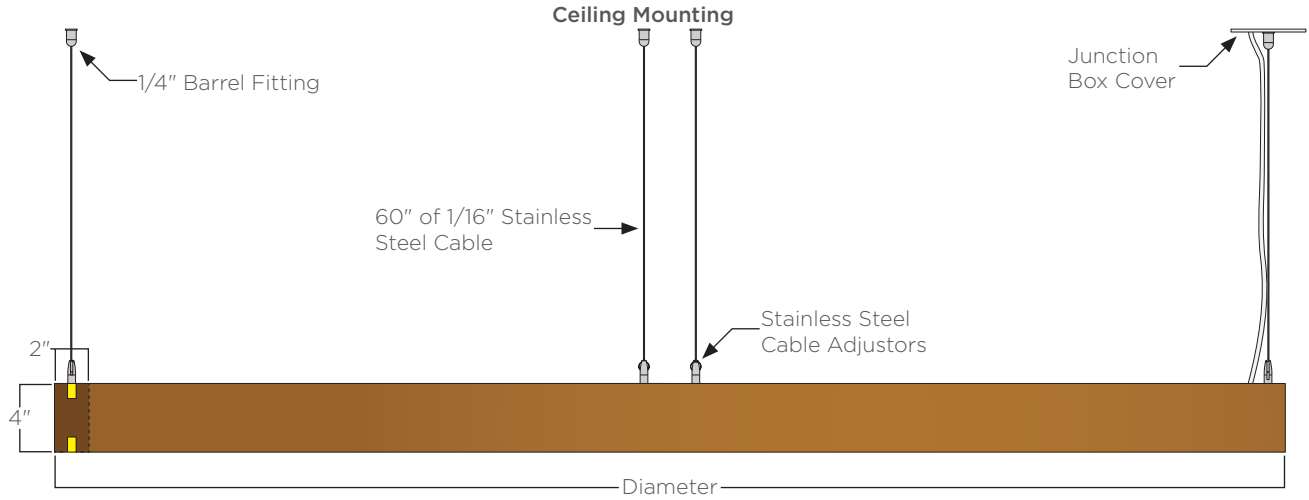

Dia.	Watts	Lumens	Weight	EPA
2'	38	1200	15lbs.	.57ft ²
3'	60	1920	23lbs.	.84ft ²
4'	85	2720	30lbs.	1.13ft ²
5'	107	3440	39lbs.	1.41ft ²
6'	132	4240	45lbs.	1.69ft ²

Candela - Direct/Indirect

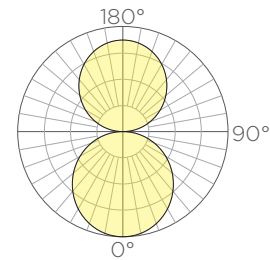

ORDERING GUIDE: EXAMPLE: AURA-RNG-D/I-4-L30S0-S4-CE-STD



AURA	RNG	D/I					CE	
1	2	3	4	5	6	7	8	9

1 Series
AURA Aura

2 Series
RNG Ring

3 Lighting
D/I Direct/Indirect

4 Diameter
2 2'
3 3'
4 4'
5 5'
6 6'

5 CCT
L27 2700K
L30 3000K
L35 3500K
L40 4000K

6 Output
SO Standard Output


7 Wood Finish
S* See color options on finishes technical sheet

8 Mounting
CE Ceiling Canopy


9 Special
STD Standard
MOD Modified

Aura Ring - Direct Lighting


Standard Output Isofootcandle Curve




AURA-RING-D-2-L35SO Mounted at 10'




AURA-RING-D-3-L35SO Mounted at 10'



AURA-RING-D-4-L35SO Mounted at 10'



AURA-RING-D-5-L35SO Mounted at 10'



AURA-RING-D-6-L35SO Mounted at 10'