

Aura Illuminated Wooden Ring Pendant

FIXTURE TYPE: _____

PROJECT NAME: _____



Solid wood exterior/interior LED round pendant.

FEATURES:

- Available in 2' to 6' diameters
- Smooth, dot free illumination
- Dimmable IP65 power supply and IP67 luminaire
- Catenary cable and ceiling mounting options

SPECIFICATIONS:

HOUSING: Solid Accoya wood linear assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, waterproof, and rated for wet or dry use exposure.

ELECTRICAL: Powered by a 100-305V primary/24V DC secondary remote dimmable power supply. Driver features built-in short circuit, over temperature, over voltage, and over current. System is 0-10V dimming down to 8%. Catenary mounted fixtures supplied with 1' infeed cable. A 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6' infeed cable. Constructed with a US and Canada UL listed luminaire.


OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination. Consult factory for other lumen outputs. Operating temperature of -40°F to 131°F.

FINISHES AND MATERIALS: Wood is finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors.


HARDWARE: All fasteners and non-wood components are stainless steel unless otherwise noted.

WARRANTY: 25-year wood warranty with a 5-year finish warranty. 3-year warranty on LED and driver.

Aura Ring - Direct Lighting

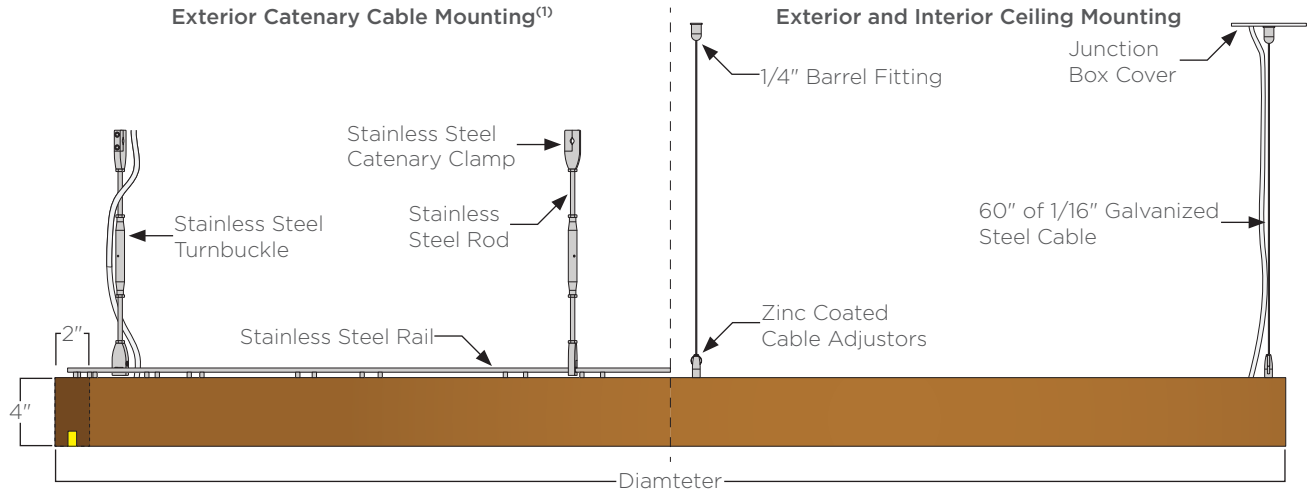

Dia.	Watts	Lumens	Weight ⁽²⁾	EPA ⁽²⁾
2'	23	720	17lbs.	.69ft ²
3'	35	1120	25lbs.	.95ft ²
4'	47	1480	32lbs.	1.24ft ²
5'	58	1840	41lbs.	1.52ft ²
6'	70	2240	47lbs.	1.81ft ²

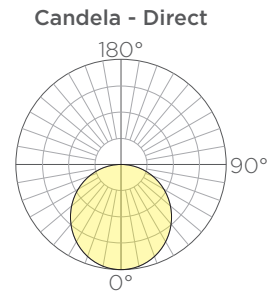


ORDERING GUIDE: EXAMPLE: AURA-RNG-D-6-L2750-S4-CA-STD



1	Series	4	Diameter	6	Output	8	Mounting
AURA	Aura	2	2'	SO	Standard Output	CA	Catenary Cable
2	Series	3	3'	7	Wood Finish	CE	Ceiling Canopy
RNG	Ring	4	4'	S*	See color options on finishes technical sheet	9	Special
3	Lighting	5	5'			STD	Standard
D	Direct	6	6'			MOD	Modified
		L27	CCT				
		L30	2700K				
		L35	3000K				
		L40	3500K				
			4000K				


1. Catenary cable designed and provided by others.
2. Weight and EPA based off of catenary mounting option.

Aura Ring - Direct/Indirect Lighting

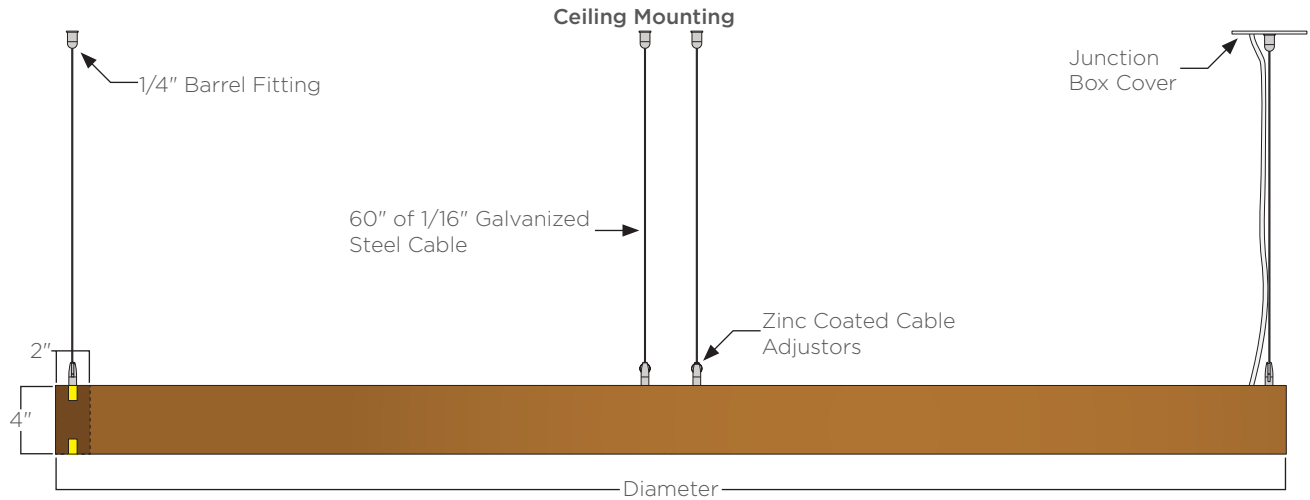

Dia.	Watts	Lumens	Weight	EPA
2'	38	1200	15lbs.	.57ft ²
3'	60	1920	23lbs.	.84ft ²
4'	85	2720	30lbs.	1.13ft ²
5'	107	3440	39lbs.	1.41ft ²
6'	132	4240	45lbs.	1.69ft ²

Candela - Direct/Indirect

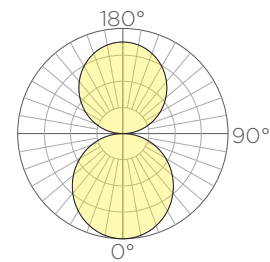

ORDERING GUIDE: EXAMPLE: AURA-RNG-D/I-4-L30S0-S4-CE-STD




AURA	RNG	D/I					CE	
1	2	3	4	5	6	7	8	9


1	Series	4	Diameter	6	Output	8	Mounting
AURA	Aura	2	2'	SO	Standard Output	CE	Ceiling Canopy
2	Series	3	3'	7	Wood Finish	9	Special
RNG	Ring	4	4'	S*	See color options on finishes technical sheet	STD	Standard
3	Lighting	5	CCT			MOD	Modified
D/I	Direct/Indirect	L27	2700K				
		L30	3000K				
		L35	3500K				
		L40	4000K				

Aura Ring - Direct Lighting


Standard Output Isofootcandle Curve




AURA-RING-D-2-L35SO
Mounted at 10'




AURA-RING-D-3-L35SO
Mounted at 10'

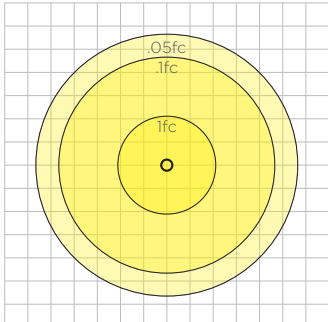

AURA-RING-D-4-L35SO
Mounted at 10'



AURA-RING-D-5-L35SO
Mounted at 10'



AURA-RING-D-6-L35SO
Mounted at 10'