

FIXTURE TYPE: _____

PROJECT NAME: _____



Aluminum bollard with 360° illumination.

FEATURES:

- Designed for landscape lighting
- Available in 24" or 36" heights
- Small footprint with traditional anchor or landscape spike mounting options

SPECIFICATIONS:

CONSTRUCTION: Casted aluminum baseplate, upright, and LED housing.

ELECTRICAL: Powered by a 120-277VAC primary integral power supply. Operating temperature of -4°F to 122°F.


OPTICAL SYSTEM: LED available in 3000K and 4000K. LED module behind a light diffusion polycarbonate. System is 5W.

FINISHES AND MATERIALS: All exterior aluminum parts are polyester powder coat painted to AAMA-2604 standards. [Care and Maintenance](#)

HARDWARE: All hardware is stainless steel. Anchor bolt kit is hot dipped galvanized.

LISTINGS & RATINGS: Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598. Suitable for wet locations. Ingress protection rating of IP66.



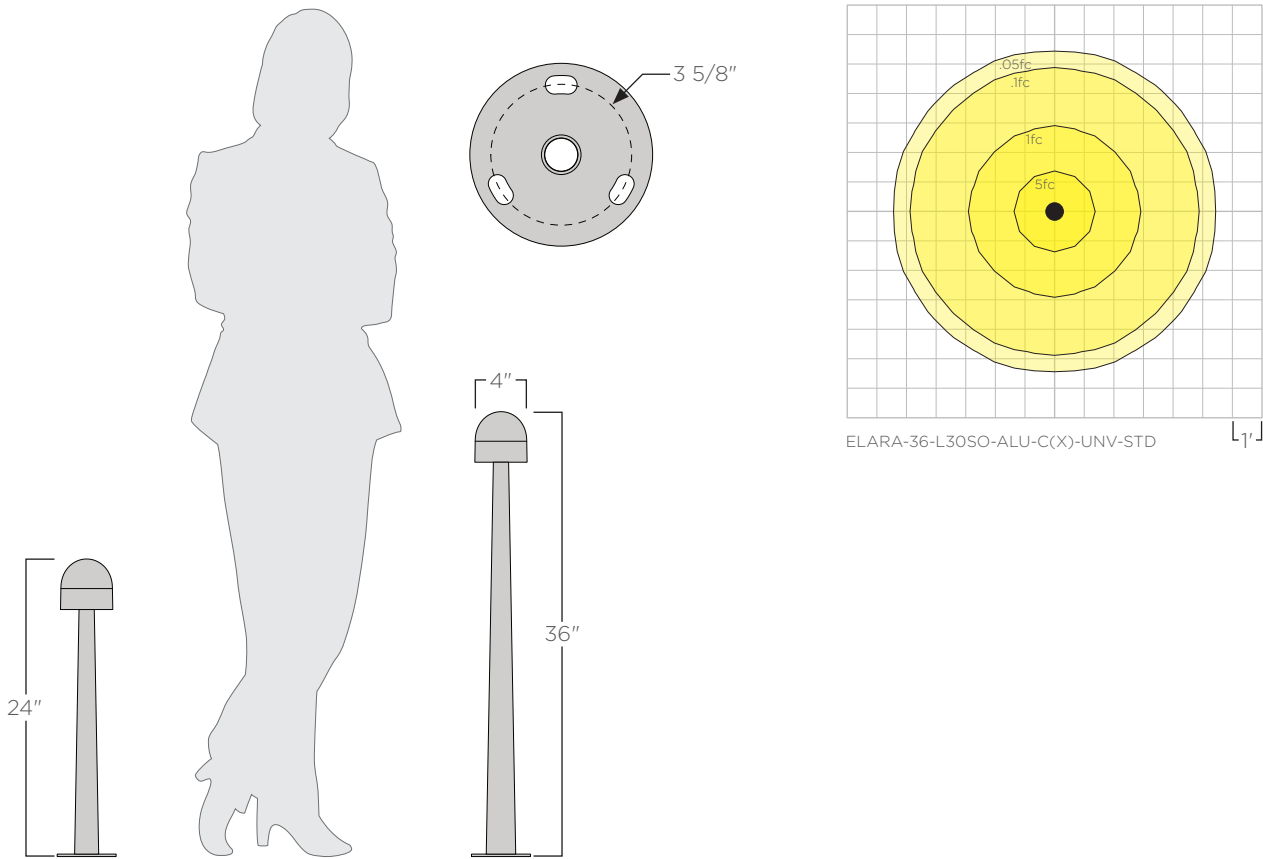

ORDERING GUIDE: EXAMPLE: ELARA-24-L30SO-C3-UNV-TA-STD



ELARA						UNV	STD
1	2	3	4	5	6	7	8

1	Series	4	Light Source	7	Anchor Bolts
ELARA	Elara	SO	Standard Output	TA	Traditional Anchors
2	Height	5	Metal Finish	SP	Landscape spike
24	24"	C*	See color options on finishes technical sheet	8	Special
36	36"	CSM	Custom Color	STD	Standard
3	Light Color	6	Voltage		
L30	3000K	UNV	120-277V		
L40	4000K				