

FIXTURE TYPE: _____

PROJECT NAME: _____



Solid wood exterior/interior LED rectangular pendant.

FEATURES:

- Available in a wide variety of sizes
- >90CRI smooth, dot free illumination
- Dimmable IP67 power supply and IP67 luminaire
- Catenary cable, ceiling, and wall mounting options

SPECIFICATIONS:

HOUSING: Solid Accoya wood linear assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, waterproof, and rated for wet or dry use exposure.

ELECTRICAL: Powered by a standalone Q-Tran QZ, 120-277VAC primary/24VDC secondary outdoor rated remote dimmable power supply. Power supply features built-in short circuit protection, over

load protection, and over temperature protection. System is forward phase, reverse phase, and 1-10V dimming. Consult factory for other driver options. Catenary mounted fixtures supplied with 1' infeed cable. A 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6' infeed cable. Operating temperature of -13°F to 125°F SO, 115°F MO, and 108°F HO.


OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination.

FINISHES AND MATERIALS: Wood is finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors. [Care and Maintenance](#)


HARDWARE: All fasteners and non-wood components are stainless steel unless otherwise noted.

LISTINGS & RATINGS: Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598 and UL Standard 2108. Suitable for wet locations. LM-80 test calculated L70 > 40,000 hours.

WARRANTY: 25-year wood warranty with a 2-year finish warranty. 3-year warranty on LED and driver.

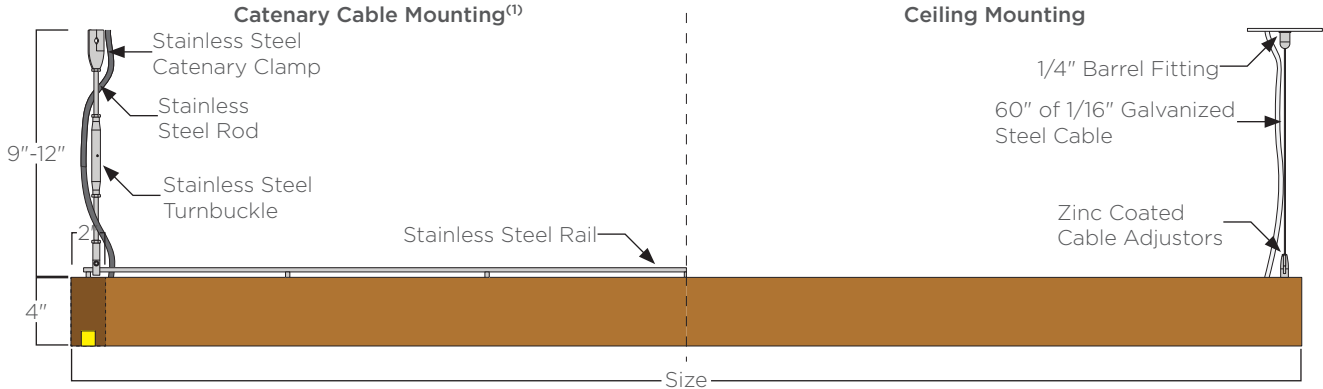

| Size | Standard Output | | Medium Output | | High Output | | Weight ⁽²⁾ | EPA ⁽²⁾ |
|------|-----------------------|-------|-----------------------|-------|-----------------------|-------|-----------------------|---------------------|
| | Lumens ⁽²⁾ | Watts | Lumens ⁽²⁾ | Watts | Lumens ⁽²⁾ | Watts | | |
| 1x4 | 1080 | 15 | 1980 | 30 | 2940 | 50 | 26lbs. | 1.73ft ² |
| 1x6 | 1512 | 21 | 2772 | 42 | 4116 | 70 | 35lbs. | 2.53ft ² |
| 2x2 | 864 | 12 | 1584 | 24 | 2352 | 40 | 21lbs. | .93ft ² |
| 2x4 | 1296 | 18 | 2376 | 36 | 3528 | 60 | 31lbs. | 1.73ft ² |
| 2x6 | 1728 | 24 | 3168 | 48 | 4704 | 80 | 40lbs. | 2.53ft ² |
| 2x8 | 2160 | 30 | 3960 | 60 | 5880 | 100 | 50lbs. | 3.33ft ² |
| 3x3 | 1296 | 18 | 2376 | 36 | 3528 | 60 | 31lbs. | 1.33ft ² |
| 3x6 | 1944 | 27 | 3564 | 54 | 5292 | 90 | 45lbs. | 2.53ft ² |
| 4x4 | 1728 | 24 | 3168 | 48 | 4704 | 80 | 40lbs. | 1.73ft ² |
| 4x8 | 2592 | 36 | 4752 | 72 | 7056 | 120 | 59lbs. | 3.33ft ² |
| 5x5 | 2160 | 30 | 3960 | 60 | 5880 | 100 | 50lbs. | 2.06ft ² |
| 6x6 | 2592 | 36 | 4752 | 72 | 7056 | 120 | 59lbs. | 2.53ft ² |

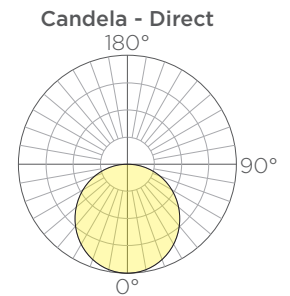


ORDERING GUIDE: EXAMPLE: AURA-RCT-D-2x8-L30MO-S3-CA-STD



| | | | | | | | | |
|-------------|---|----------|---|---|---|---|---|---|
| AURA | | D | | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |


| | | | | | | | |
|--------------------------|--------------------------------------|---------------------------|---|-------------------------------------|--|--------------------------|---|
| 1 | Series Aura | 4 | Size 1' x 4' 1' x 6' 2' x 2' 2' x 4' 2' x 6' 2' x 8' 3' x 3' 3' x 6' 4' x 4' 4' x 8' 5' x 5' 6' x 6' | 5 | CCT 2700K 3000K 3500K 4000K | 7 | Wood Finish See color options on finishes technical sheet |
| 2 | Series Square Rectangle | 3 | | 6 | Output Standard Output Medium Output High Output | 8 | Mounting Catenary Cable Ceiling Canopy |
| SQR RCT | | Lighting Direct | | SO MO HO | | CA CE | |
| 3 | | | | | | 9 | Special Standard Modified |
| D | | | | | | STD MOD | |

1. Catenary cable designed and provided separately.
 2. Lumen output based upon 3000K CCT.
 3. Weight and EPA based off of catenary mounting option.

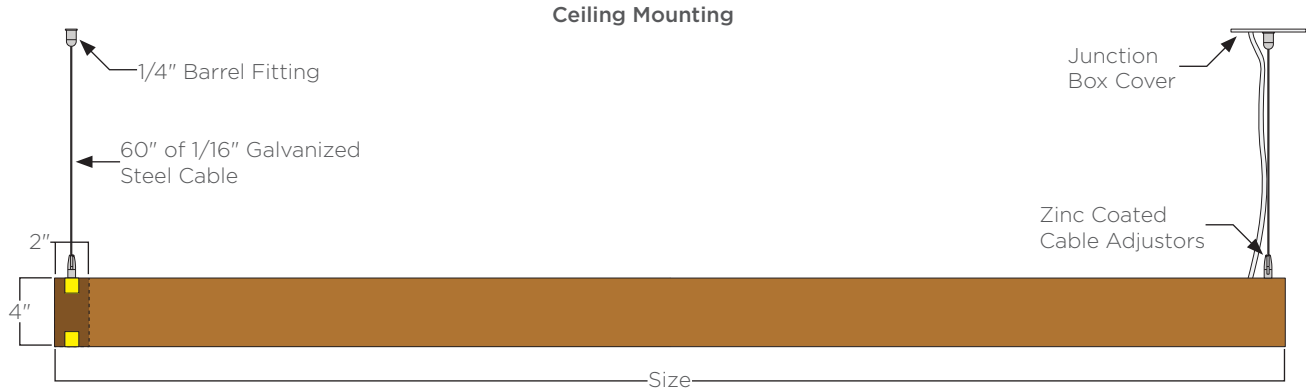

| Size | Standard Output | | Medium Output | | High Output | | Weight | EPA |
|------|-----------------------|-------|-----------------------|-------|-----------------------|-------|--------|---------------------|
| | Lumens ⁽¹⁾ | Watts | Lumens ⁽¹⁾ | Watts | Lumens ⁽¹⁾ | Watts | | |
| 1x4 | 2016 | 28 | 3696 | 56 | 5488 | 94 | 24lbs. | 1.68ft ² |
| 1x6 | 2880 | 40 | 5280 | 80 | 7840 | 134 | 33lbs. | 2.48ft ² |
| 2x2 | 1584 | 22 | 2904 | 44 | 4312 | 74 | 19lbs. | .88ft ² |
| 2x4 | 2448 | 34 | 4488 | 68 | 6664 | 114 | 29lbs. | 1.68ft ² |
| 2x6 | 3312 | 46 | 6072 | 92 | 9016 | 154 | 38lbs. | 2.48ft ² |
| 2x8 | 4176 | 58 | 7656 | 116 | 11368 | 194 | 48lbs. | 3.28ft ² |
| 3x3 | 2448 | 34 | 4488 | 68 | 6664 | 114 | 29lbs. | 1.28ft ² |
| 3x6 | 3744 | 52 | 6864 | 104 | 10192 | 174 | 43lbs. | 2.48ft ² |
| 4x4 | 3312 | 46 | 6072 | 92 | 9016 | 154 | 38lbs. | 1.68ft ² |
| 4x8 | 5040 | 70 | 9240 | 140 | 13720 | 234 | 57lbs. | 3.28ft ² |
| 5x5 | 4176 | 58 | 7656 | 116 | 11368 | 194 | 48lbs. | 2.01ft ² |
| 6x6 | 5040 | 70 | 9240 | 140 | 13720 | 234 | 57lbs. | 2.48ft ² |

Candela - Direct/Indirect




ORDERING GUIDE: EXAMPLE: AURA-SQR-D/I-2x2-L35HO-S6-CE-STD



| | | | | | | | | |
|-------------|---|------------|---|---|---|---|-----------|---|
| AURA | | D/I | | | | | CE | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |


| | | | | | | | |
|------------|--|------------|---|------------|--|------------|---|
| 1 | Series Aura | 4 | Size 1' x 4' 1' x 6' 2' x 2' 2' x 4' 2' x 6' 2' x 8' 3' x 3' 3' x 6' 4' x 4' 4' x 8' 5' x 5' 6' x 6' | 5 | CCT 2700K 3000K 3500K 4000K | 7 | Wood Finish See color options on finishes technical sheet |
| 2 | Series Square Rectangle | 2x4 | | L27 | | S* | |
| SQR | | 2x6 | | L30 | | 8 | Mounting Ceiling Canopy |
| RCT | | 2x8 | | L35 | | CE | |
| 3 | Lighting Direct/ Indirect | 3x3 | | L40 | | 9 | Special Standard Modified |
| D/I | | 3x6 | | 6 | Output Standard Output Medium Output High Output | STD | |
| | | 4x4 | | SO | | MOD | |
| | | 4x8 | | MO | | | |
| | | 5x5 | | HO | | | |
| | | 6x6 | | | | | |

1. Lumen output based upon 3000K CCT.

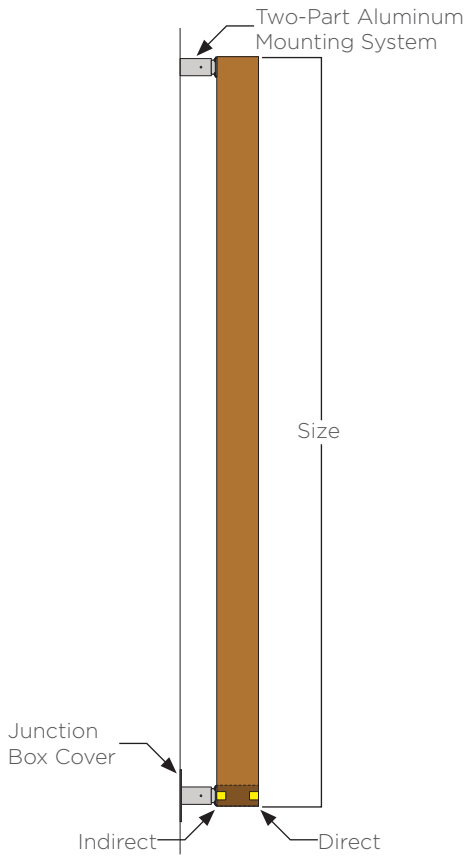

| Size | Standard Output | | Medium Output | | High Output | | Weight |
|------|-----------------|-----------|---------------|-----------|-------------|-----------|--------|
| | Watts D | Watts D/I | Watts D | Watts D/I | Watts D | Watts D/I | |
| 1x4 | 15 | 28 | 30 | 56 | 50 | 94 | 26lbs. |
| 1x6 | 21 | 40 | 42 | 80 | 70 | 134 | 35lbs. |
| 2x2 | 12 | 22 | 24 | 44 | 40 | 74 | 21lbs. |
| 2x4 | 18 | 34 | 36 | 68 | 60 | 114 | 31lbs. |
| 2x6 | 24 | 46 | 48 | 92 | 80 | 154 | 40lbs. |
| 2x8 | 30 | 58 | 60 | 116 | 100 | 194 | 50lbs. |
| 3x3 | 18 | 34 | 36 | 68 | 60 | 114 | 31lbs. |
| 3x6 | 27 | 52 | 54 | 104 | 90 | 174 | 45lbs. |
| 4x4 | 24 | 46 | 48 | 92 | 80 | 154 | 40lbs. |
| 4x8 | 36 | 70 | 72 | 140 | 120 | 234 | 59lbs. |
| 5x5 | 30 | 58 | 60 | 116 | 100 | 194 | 50lbs. |
| 6x6 | 36 | 70 | 72 | 140 | 120 | 234 | 59lbs. |

Candela - Direct/Indirect



ORDERING GUIDE: EXAMPLE: AURA-SQR-I-4x4-L3050-S3-C2-WA4-STD



| | | | | | | | | | |
|-------------|---|---|---|---|---|---|---|---|----|
| AURA | | | | | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |

| | | | | | | | |
|------------|--------------------------------------|---|---|-----------|---|------------|--|
| 1 | Series Aura | 4 | Size 1' x 4' 1' x 6' 2' x 2' 2' x 4' 2' x 6' 2' x 8' 3' x 3' 3' x 6' 4' x 4' 4' x 8' 5' x 5' 6' x 6' | 5 | CCT 2700K 3000K 3500K 4000K | 8 | Metal Finish **** See color options on finishes technical sheet Custom Color |
| 2 | Series Square Rectangle | 3 | | 6 | Output Standard Output Medium Output High Output | 9 | Mounting 4" Wall Mount 8" Wall Mount |
| SQR | | Lighting | | SO | | WA4 | |
| RCT | | Direct Indirect Direct/ Indirect | | MO | | WA8 | |
| 3 | | | | HO | | 10 | Special Standard Modified |
| D | | | | 7 | Wood Finish See color options on finishes technical sheet | STD | |
| I | | | | S* | | MOD | |
| D/I | | | | | | | |