

# Duo Light Column Duo Family Aluminum LED Light Column

STRUCTURA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



Double aluminum extrusion uprights with wood or metal center accents.

## FEATURES:

- High power, low wattage LED light module
- Available with wood or aluminum accent panels
- Concealed anchor bolt base and mounting hardware

## SPECIFICATIONS:


**CONSTRUCTION:** Rectangular extruded aluminum 6063-T6 tubes welded to aluminum 356 base plate and top cap with aluminum 6061-T6 internal supports.

Bollard is fastened to a concrete anchor bolt base with concealed hardware accessible behind accent panel. Anchor bolt kit includes (4) hot dip galvanized anchor bolts and fasteners and a ridged concrete pour template.

**ELECTRICAL:** Powered by a Class P 120-277VAC primary integral power supply behind gasketed handhole cover behind accent panel. Standard output is 26W. System is 0-10V dimmable. Minimum -40°C operating temperature.


**OPTICAL SYSTEM:** LED boards have solderless connections for field upgradability. Available in 2700K, 3000K, 3500K and 4000K color temperatures with >90 CRI. Optics are UV resistant molded PMMA in Type III, IV, and V distributions. Consult factory for additional lumen output, CCT, and optical distribution options.

**FINISHES AND MATERIALS:** Wood pieces are finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors. All exterior aluminum parts are polyester powder coat painted to AAMA-2604 standards. [Care and Maintenance](#)

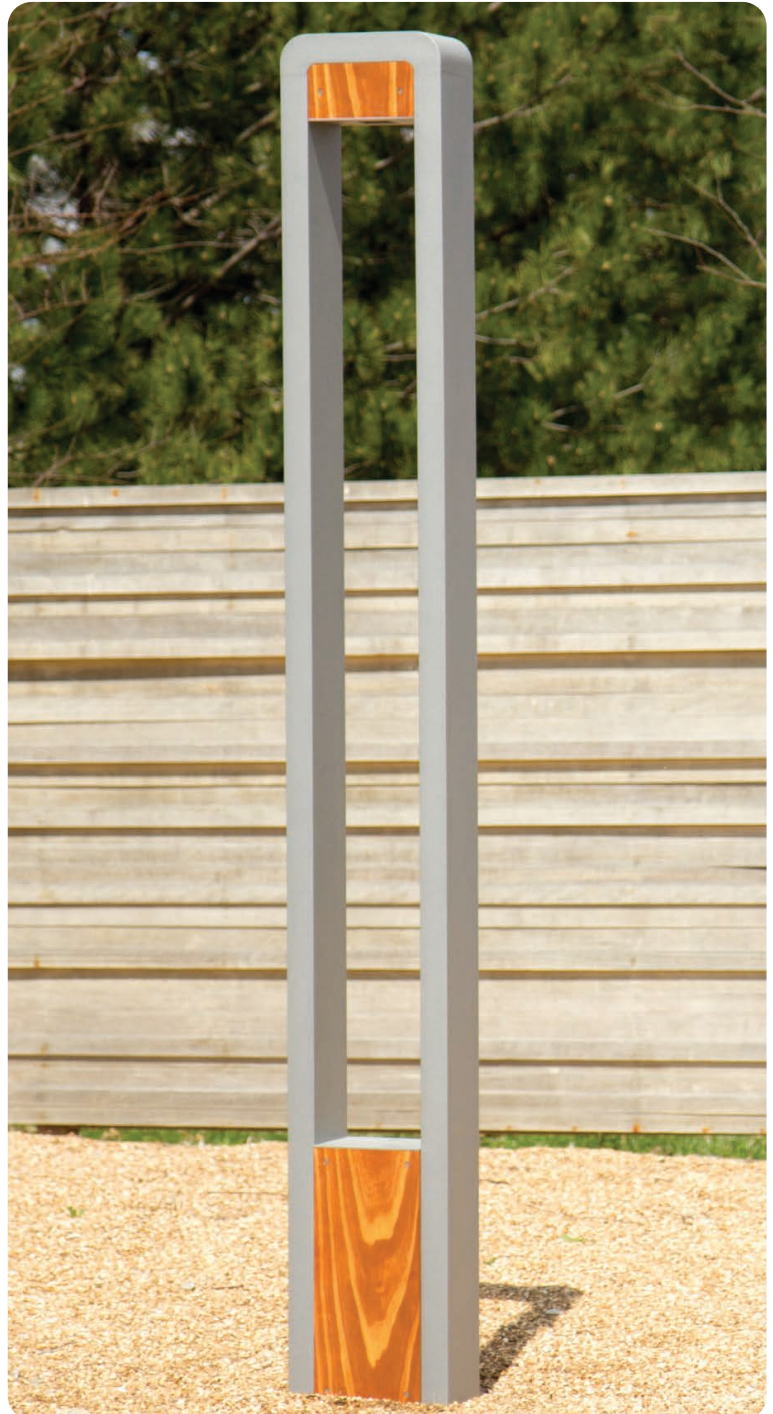


**HARDWARE:** All luminaire hardware is stainless steel. Anchor bolt kit is hot dipped galvanized.

**LISTINGS & RATINGS:** Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598. Suitable for wet locations. LM-80 test reported L70 > 60,500 hours and calculated L70 > 154,000 hours.

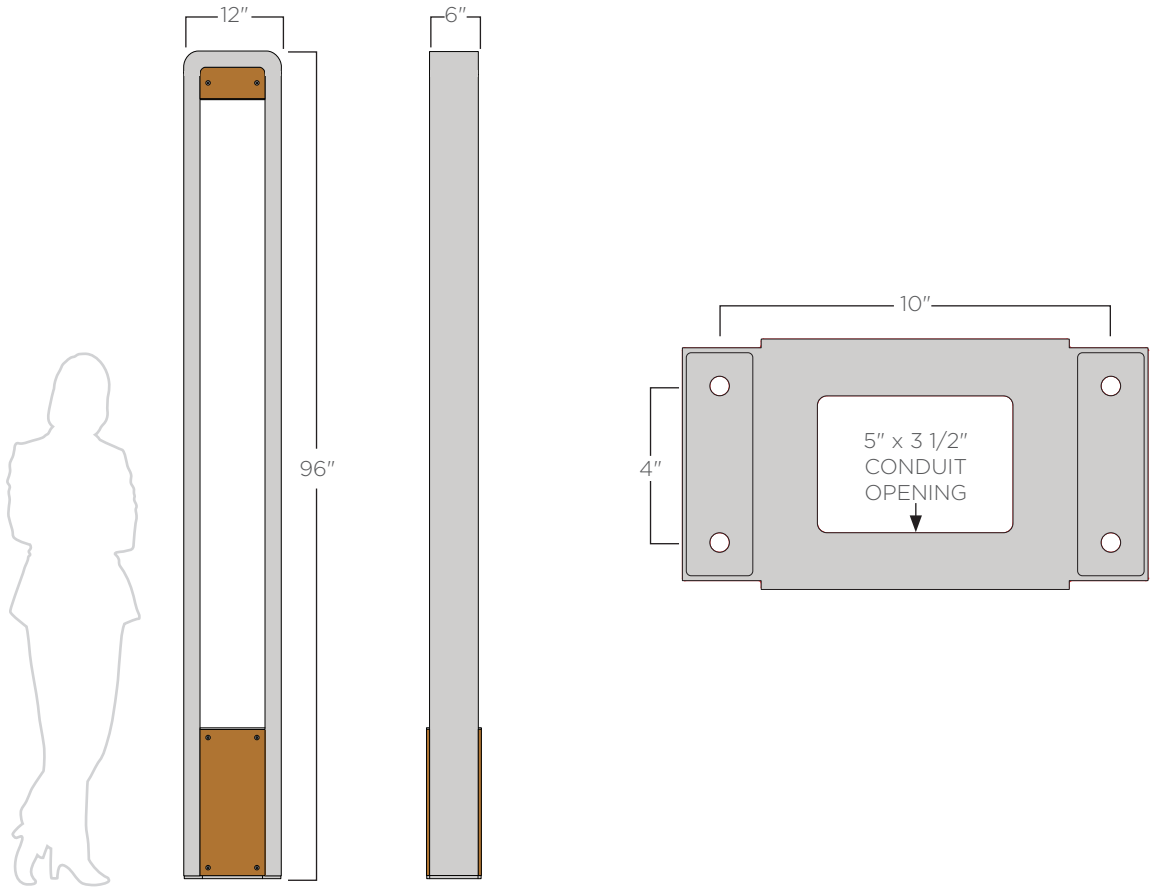

**ORDERING GUIDE:** EXAMPLE: DLC-96-L30S0-5-C3-P2/C5-UNV-STD




<b>1</b>	<b>Series</b>	<b>4</b>	<b>Light Source<sup>(1)</sup></b>	<b>7</b>	<b>Panel Material</b>
<b>DLC</b>	Duo Light Column	<b>SO</b>	Standard Output	<b>P1/S*</b> <b>P2/C*</b>	Wood (specify wood color) <sup>(3)</sup> Aluminum (specify paint color) <sup>(3)</sup>
<b>2</b>	<b>Overall Height</b>	<b>5</b>	<b>Distribution</b>	<b>8</b>	<b>Voltage</b>
<b>96</b>	96"	<b>3</b>	Type III	<b>UNV</b>	120-277V
<b>3</b>	<b>Color Temperature</b>	<b>3R</b>	Type III Rotated <sup>(2)</sup>	<b>9</b>	<b>Special</b>
<b>L27</b>	2700K	<b>4</b>	Type IV	<b>STD</b>	Standard
<b>L30</b>	3000K	<b>5</b>	Type V	<b>MOD</b>	Modified
<b>L35</b>	3500K	<b>6</b>	<b>Bollard Finish</b>		
<b>L40</b>	4000K	<b>C*</b>	See color options on finishes technical sheet		
<b>AMB</b>	Amber	<b>CSM</b>	Custom Color		


1. Consult factory for additional output options  
 2. Type III Rotated optics requires bollard to be rotated so that the short side is towards the sidewalk.  
 3. See color options on finishes technical sheet.

FIXTURE TYPE: \_\_\_\_\_


PROJECT NAME: \_\_\_\_\_

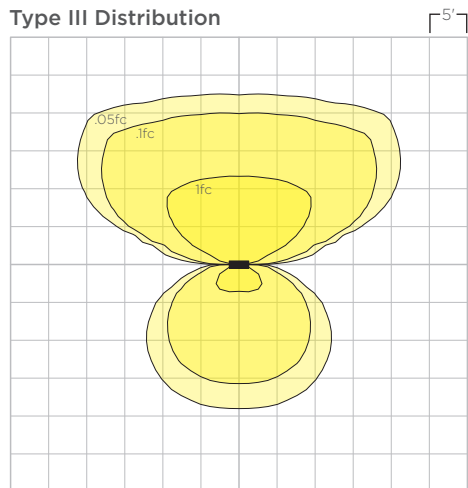


DLC-96-L27SO-3-C(X)-P(X)/(XX)-UNV-STD

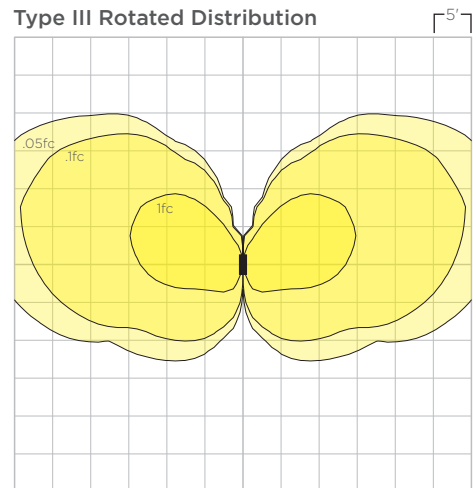

DLC-96-L27SO-3R-C(X)-P(X)/(XX)-UNV-STD

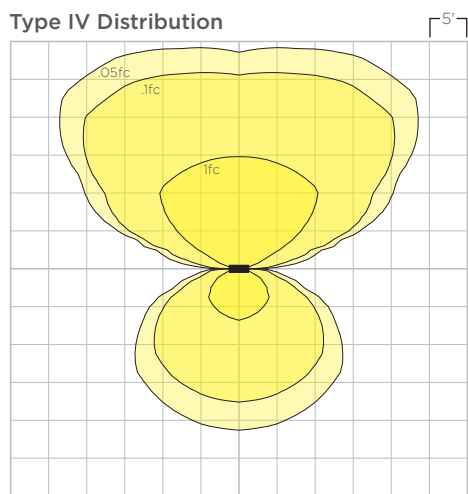

DLC-96-L27SO-4-C(X)-P(X)/(XX)-UNV-STD

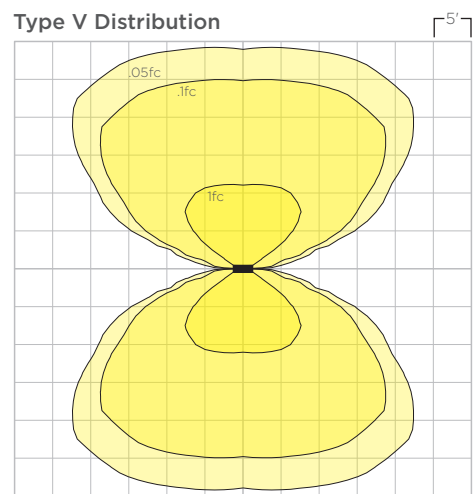

DLC-96-L27SO-5-C(X)-P(X)/(XX)-UNV-STD