

FIXTURE TYPE: _____

PROJECT NAME: _____



SPECIFICATIONS:

CONSTRUCTION: Casted aluminum LED housing and baseplate with extruded aluminum upright.

ELECTRICAL: Powered by a 120-277VAC primary integral power supply. Operating temperature of -4°F to 122°F.




OPTICAL SYSTEM: LED available in 3000K and 4000K. Aluminum reflector behind clear polycarbonate available in anodized aluminum or low glare matte black. LED system is 14W.

FINISHES AND MATERIALS: All exterior aluminum parts are polyester powder coat painted to AAMA-2604 standards. [Care and Maintenance](#)

HARDWARE: All hardware is stainless steel. Anchor bolt kit is hot dipped galvanized.

LISTINGS & RATINGS: Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598. Suitable for wet locations. Ingress protection rating of IP65.



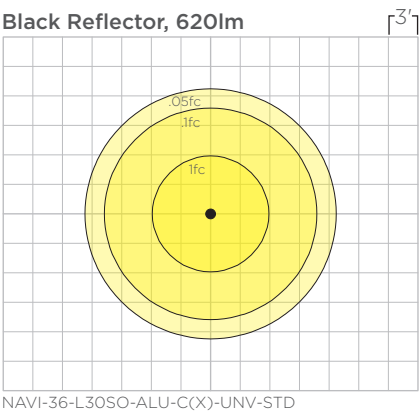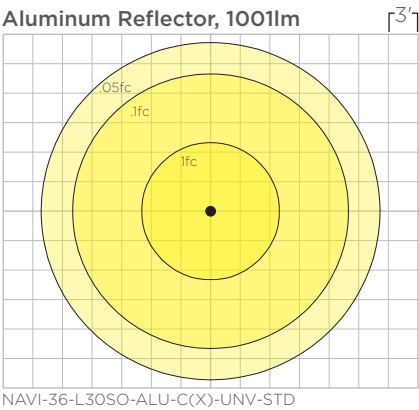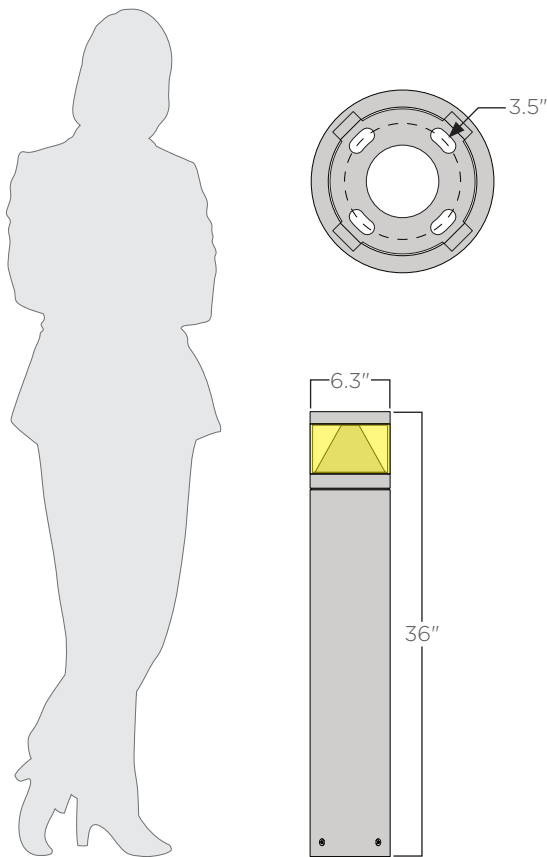

ORDERING GUIDE: EXAMPLE: NAVI-36-L30SO-BLK-C5-UNV-STD



NAVI						UNV		STD
1	2	3	4	5	6	7	8	9

1	Series	4	Light Source	7	Voltage
NAVI	Navi	SO	Standard Output	UNV	120-277V
2	Height	5	Reflector	8	Options
36	36"	ALU	Anodized Aluminum	GFCI	GFCI Box ⁽¹⁾
3	Light Color	BLK	Matte Black	9	Special
L30	3000K	6	Metal Finish	STD	Standard
L40	4000K	C*	See color options on finishes technical sheet		
		CSM	Custom Color		

1. GFCI box comes with in-use or wet location cover. Outlet supplied by others.