

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



Shown with Plaza arm, banner arm option, and modified top.

Steel H-beam upright with wood accent panels.

## FEATURES:

- Roadway or pedestrian pole heights up to 30'
- Catenary cable capabilities
- Available in 6", 8", and 10" square sizes

## SPECIFICATIONS:

**CONSTRUCTION:** Formed A992 steel beam welded to an A572 steel baseplate. Solid wood panel is assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, is waterproof and rated for wet or dry use exposure.

**ELECTRICAL:** A 5/16" - 18 grounding point is provided on the aluminum pole center support. Wireway access is provided through a NEC compliant handhole hidden behind accent panel.



**FINISHES AND MATERIALS:** All metal parts are polyester powder coat painted. Wood panels are finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors. [Care and Maintenance](#)

**HARDWARE:** All fasteners and hardware are stainless steel. Anchor bolt kits are ASTM F1554 grade 55 steel with galvanized steel hex nuts and washers.

**FIXTURE MOUNTING:** Fixtures mount to pole from bolt pattern, horizontal mast arm, or custom arm.



Shown with custom arm.

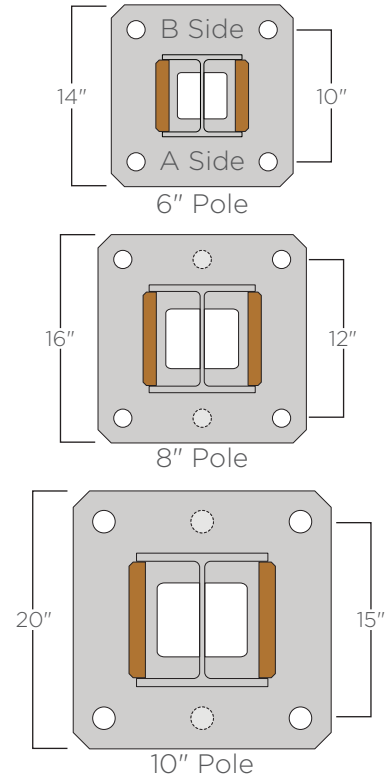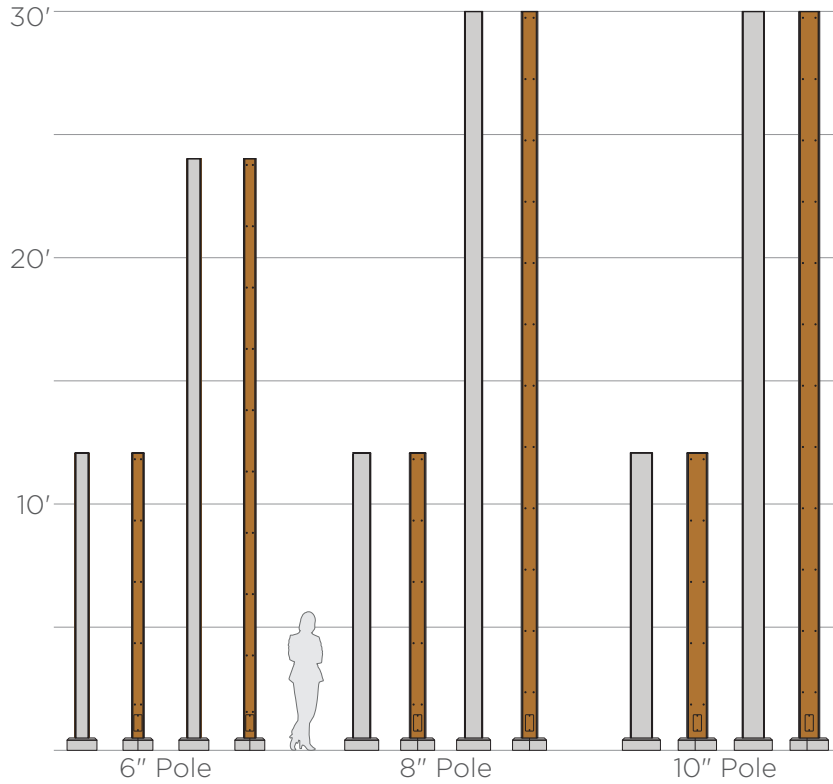

**ORDERING GUIDE:** EXAMPLE: BEAM-20-6-4-C5-A18-B12-S5-STD



<b>1</b>	<b>BEAM</b>
<b>2</b>	<b>12</b> <b>30</b> <b>**</b>
<b>3</b>	<b>6</b> <b>8</b> <b>10</b>
<b>4</b>	<b>4</b> <b>6</b>

<b>Series</b>	Beam
<b>Pole Height<sup>(1)</sup></b>	12' 30' Specify
<b>Size</b>	6" 8" 10"
<b>Anchor Bolt</b>	4 6

<b>5</b>	<b>C*</b> <b>CSM</b>
<b>6</b>	<b>A0</b> <b>A12</b> <b>A30</b> <b>A**</b>
<b>7</b>	<b>B0</b> <b>B12</b> <b>B30</b> <b>B**</b>

<b>Pole Finish<sup>(2)</sup></b>	See color options on finishes technical sheet Custom Color
<b>A Side Fixture Mounting Height</b>	No fixture on this side 12' 30' Specify
<b>B Side Fixture Mounting Height</b>	No fixture on this side 12' 30' Specify

<b>8</b>	<b>S*</b>
<b>9</b>	<b>CAT</b> <b>BNR</b> <b>GALV</b> <b>GFCI</b>
<b>10</b>	<b>STD</b> <b>MOD</b>

<b>Wood Panel Finish</b>	See color options on finishes technical sheet
<b>Options</b>	Catenary <sup>(3)</sup> Banner Arms <sup>(4)</sup> Galvanization <sup>(5)</sup> GFCI Box
<b>Special</b>	Standard Modified

Size	Pole Weight
<b>6"</b>	57lbs + 23lbs/ft
<b>8"</b>	72lbs + 39lbs/ft
<b>10"</b>	138lbs + 54lbs/ft

1. 6" poles are available up to 24' in height.  
 2. Due to the nature of structural beams, some surface smoothness imperfections can be present.  
 3. Catenary poles must use the 8" or 10" size with 6 anchor bolts. Catenary poles must have engineering done by Structura.  
 4. Consult factory for allowable banner size based upon EPA.  
 5. Due to the nature of galvanization, some surface smoothness imperfections can be present.