FIXTURE TYPE: _____

PROJECT NAME: _____





Lineal mounted on Structura Tilt pole.

SPECIFICATIONS:

CONSTRUCTION: Seamless aluminum housing comprised of 6005A-T61 extrusion and 6061-T6 end plates. Gasketed aluminum electrical access cover attached with captive stainless steel hardware and safety cable.

ELECTRICAL: Integral Class P, 120-277V or 347-480V, dimmable constant current driver. Luminaire is pre-wired with watertight 5 conductor 18 gauge SJEOOW whip. 10kA surge suppression is standard. Operating temperature of -40°C to 50°C.


OPTICAL SYSTEM: LED boards have solderless connections for field upgradability. Available in CCT of 2700 and 3000K, >80 CRI. Optics are UV resistant molded PMMA in Type II and IV distributions. Consult factory for additional lumen output, CCT, and optical distribution options.

CONTROLS: Dimming through 0-10V input is standard. Available with integral motion sensor with photocell providing on/off and full light to dim control. Also available with wireless smart city control. See SmartCity control documentation for more information.

FINISHES: All exterior aluminum parts are polyester powder coat painted to meet AAMA 2604 standards. See Structura's finish options for available colors. Care and Maintenance

LISTINGS & RATINGS: Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598. Suitable for wet locations. LM-80 test reported L70 > 90,000 hours and calculated L70 > 110,000 hours. Bug rating: B1-U0-G1. IP65 rated.

WARRANTY: 5-year warranty on LED and drivers.

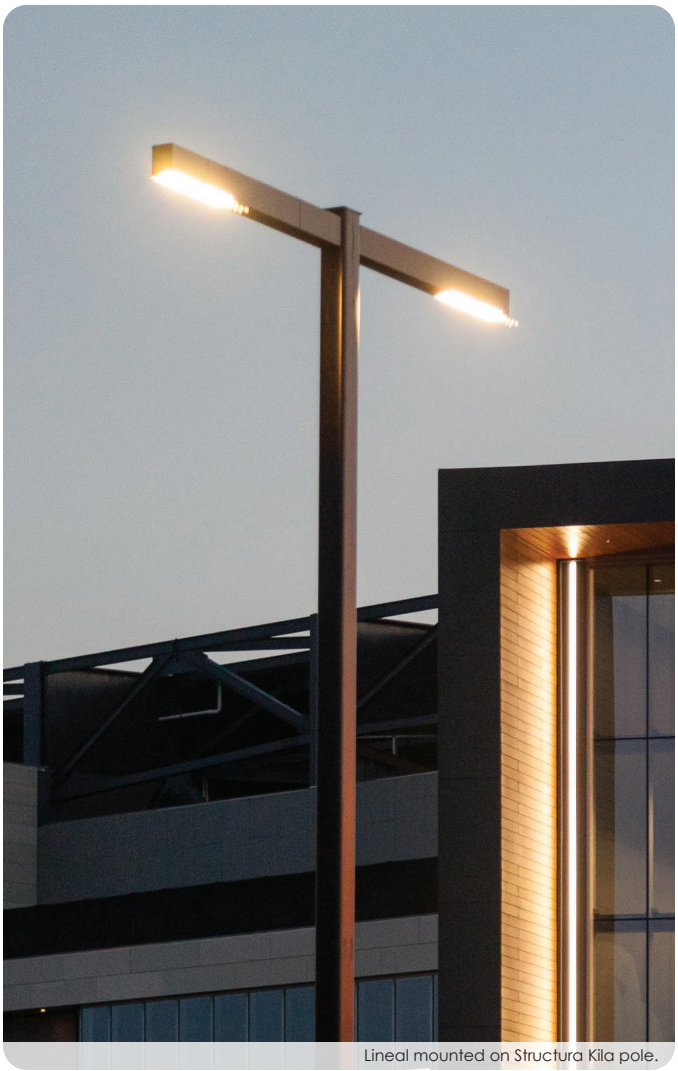

Lineal mounted on Structura Kila pole.

©2026 STRUCTURA, INC.

			2700K		3000K			
Module	mA	Wattage	Lumen[1]	Efficacy	Lumen[1]	Efficacy	EPA	Weight
1	500	21.9	2448	112.0	2508	114.7	0.81ft²	12.3lbs.
1	1000	39.5	4896	124.1	5017	127.2	0.81ft²	12.3lbs.
2	1000	39.6	4896	123.6	5017	126.6	1.00ft²	14.2lbs.
2	2000	78.9	9792	124.1	10033	127.2	1.00ft²	14.2lbs.
3	1500	57.3	7344	128.3	7525	131.4	1.19ft²	16.2lbs.
3	2250	86.5	11016	127.4	11287	130.5	1.19ft²	16.2lbs.
4	3000	117.3	14688	125.2	15050	128.3	1.55ft²	20.7lbs.
4	4000	156.6	19584	125.1	20066	128.2	1.55ft²	20.7lbs.

DARKSKY APPROVED ORDERING GUIDE: EXAMPLE: LIN-M2100-L30-4-C5-UNV-SP-MS/L3-STD

LIN								STD
1	2	3	4	5	6	7	8	9

1 Series

LIN	Lineal

2 Output[2]

M1050	500mA
M1100	1000mA
M2100	1000mA
M2200	2000mA
M3150	1500mA
M3225	2250mA
M4300	3000mA
M4400	4000mA

3 CCT[2]

L27	2700K
L30	3000K
AMB	Amber

4 Distribution[2]

2	Type II/III
4	Type IV
5	Type V

5 Metal Finish

C*	See color options on finishes technical sheet
CSM	Custom Color

6 Voltage

UNV	120-277V
HIGH	347-480V

7 Mounting

SP	Structura Pole[4]
ST	Square steel pole by Structura[5]
NA	Pole by Others

8 Options


BABA	BABA
HSS	House-Side Shield
5P	5-Pin Receptacle
MS/L*	Motion Sensor/Photocell[6]
NX	Hubbell NX controls
WC	Wireless Control[7]

9 Special


STD	Standard

1. Lumen output based upon Type II distribution.
2. Contact factory for alternative output, CCT, and distribution options. DarkSky approved with 3000K CCT or lower.
3. Structura pole specification sheet must be completed showing mounting locations and quantities as a separate item.
4. Specify steel pole on page 128 as a separate item.
5. Specify coverage pattern (see page 127 for detail). Requires wirelss handheld configuration tool.
6. Synapse Wireless site gateway controller must be ordered seperately. Please contact factory for design assistance.


©2026 STRUCTURA, INC.

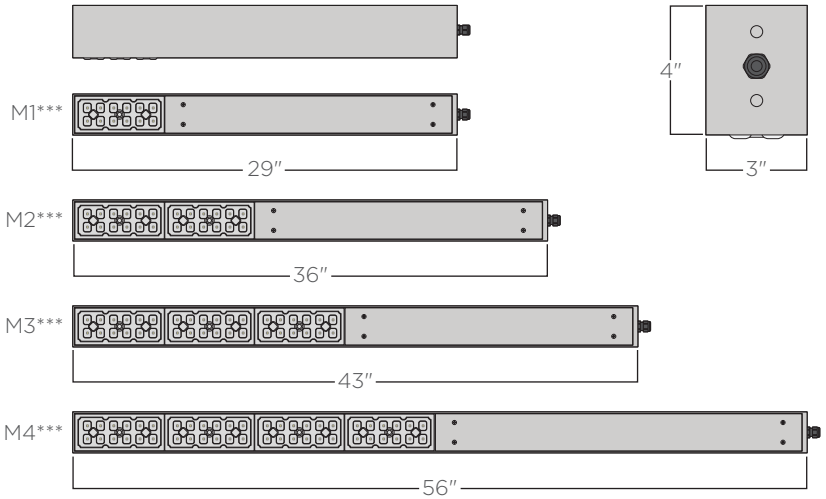

Lineal standard wiring[1]

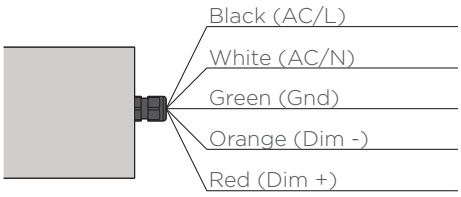


Type II Distribution

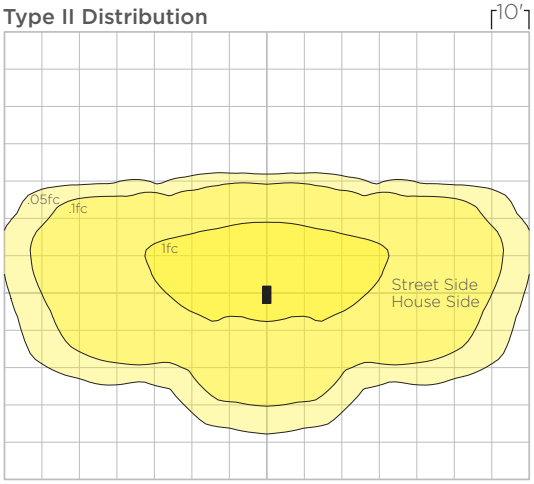


LIN-M1100-L30-2-C(X)-UNV-XX-STD mounted at 16′

Type IV Distribution

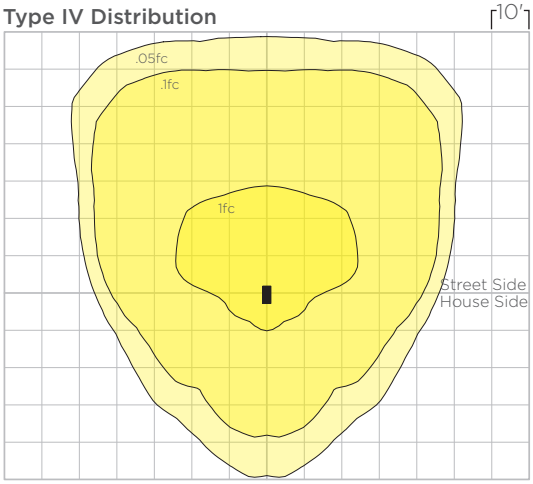

LIN-M1100-L30-4-C(X)-UNV-XX-STD mounted at 16′

Type II Distribution

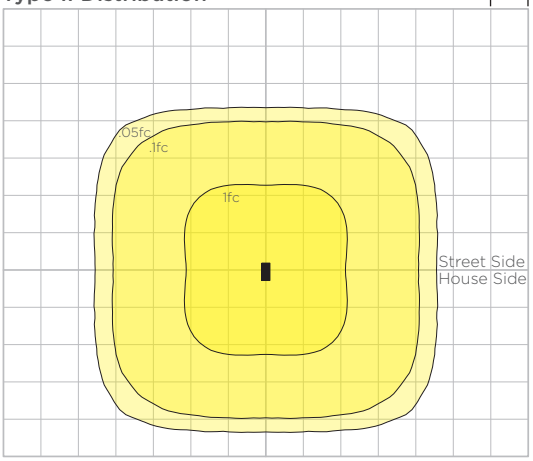


LIN-M1100-L30-5-C(X)-UNV-XX-STD mounted at 16′


IES file download

1. All fixtures are provided with a 12" 18/5 SJEOOW whip. Cap dimming wires if dimming is not required.


©2026 STRUCTURA, INC.


Motion Sensor Type L3 (ordering code MS/L3)

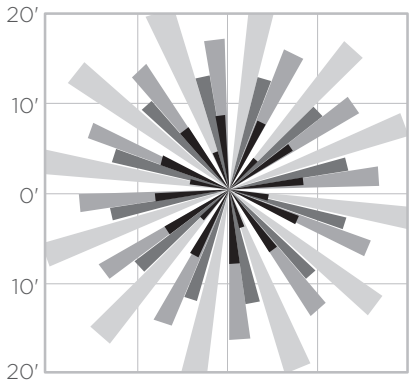

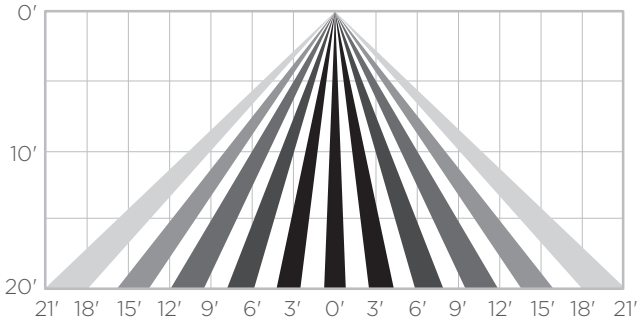

Motion Sensor Type L7 (ordering code MS/L7)

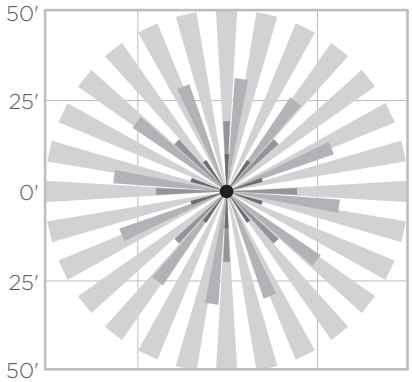

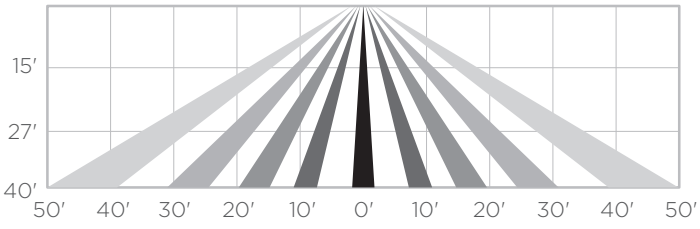

©2026 STRUCTURA, INC.


ST Straight Square Steel Pole

FIXTURE TYPE: _____


PROJECT NAME: _____

FEATURES:

- Heights available from 10 to 40′
- Polyster powder coat painted (AAMA 2604 standard)
- Supplied with a two piece casted aluminum base cover
- Multiple mounting options

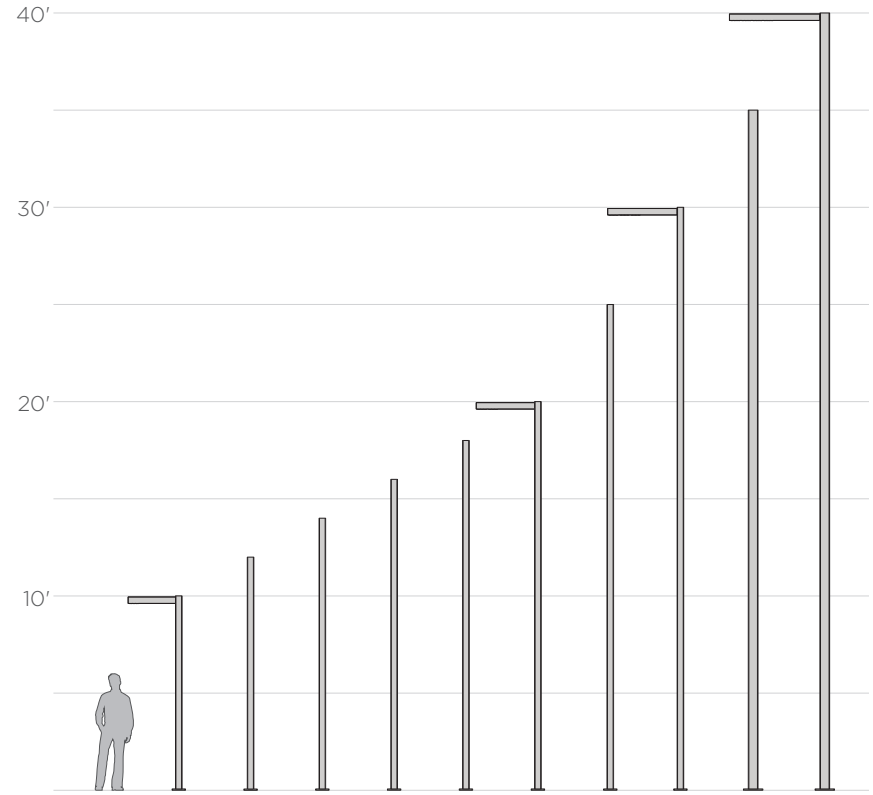

Fixture Orientation

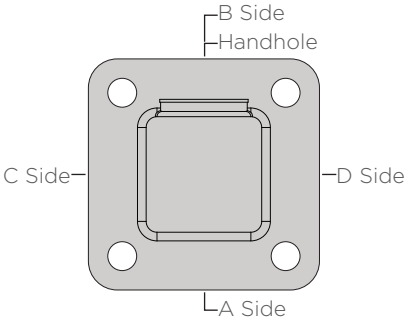

ORDERING GUIDE: EXAMPLE: ST-20-4-S-C7-A20-B12-STD

ST										STD
1	2	3	4	5	6	7	8	9	10	11

1 — Series

ST	Square Steel Pole

2 — Pole Height

10	10′
40	40′
**	Specify

3 — Pole Size

4	4″
5	5″
6	6″

4 — Wall Thickness

S	Standard
T	Thick

5 — Pole Finish

***	See color options on finishes technical sheet
CSM	Custom Color

A Side — 6 — Fixture Mounting Height

Blank	No fixture on this side
A10	10′ A Side
A12	12′ A Side
A**	Specify

B Side — 7 — Fixture Mounting Height

Blank	No fixture on this side
B**	Specify

C Side — 8 — Fixture Mounting Height

Blank	No fixture on this side
C**	Specify

D Side — 9 — Fixture Mounting Height

Blank	No fixture on this side
D**	Specify

10 — Options

BABA	BABA
BNR	Banner[1]
GALV	Galvanization[2]
GFCI	GFCI Box
VD	Vibration Dampener

11 — Special

STD	Standard

1. Consult factory for allowable EPA for banners.
2. Due to the nature of galvanization, some surface smoothness imperfections can be present.


©2026 STRUCTURA, INC.

Lineal Lineal Post Top Mounting Arm

FIXTURE TYPE: _____

PROJECT NAME: _____



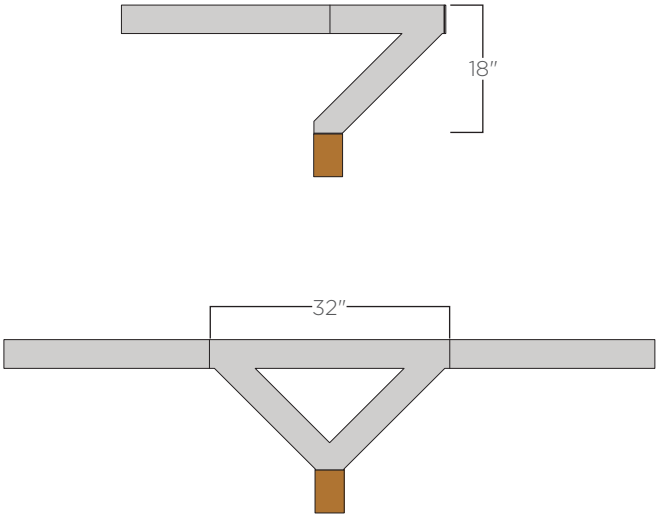

Aluminum mounting arm designed to mount the Lineal luminaire to Structura wood poles.

FEATURES:

- Easy bolt plate mounting attachment
- Pole top connection with two different connection appearances and styles
- Smooth transition from luminaire[1] to mounting arm

SPECIFICATIONS:

CONSTRUCTION: Welded aluminum 6061-T6 extrusion and plates.

FINISHES AND MATERIALS: All metal parts are polyester powder coat painted.

HARDWARE: All fasteners are stainless steel.

ELECTRICAL: Electrical raceway through center of arm connecting to pole.

ORDERING GUIDE: EXAMPLE: LIN PT-SNGL

1	2

1	Series	2	Arm
LIN PT	Lineal Post Top	SNGL DBL	Single Double

1. For use with Lineal M1075, M2150, and M3195

©2026 STRUCTURA, INC.