

FIXTURE TYPE: _____

PROJECT NAME: _____



Aluminum exterior/interior LED round pendant.

FEATURES:

- Available in 2' to 8' diameters
- >90CRI smooth, dot free illumination
- Dimmable IP67 power supply and IP67 luminaire
- Catenary cable, ceiling, and wall mounting options

SPECIFICATIONS:

HOUSING: Seamless housing comprised of custom rectangular aluminum 6063-T1 extrusion.

ELECTRICAL: Powered by a standalone Q-Tran QZ, 120-277VAC primary/24VDC secondary outdoor rated remote dimmable power supply. Power supply features built-in short circuit protection, over load protection, and over temperature protection. System is forward

phase, reverse phase, and 1-10V dimming. Consult factory for other driver options. Catenary mounted fixtures supplied with 1' infeed cable. A 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6' infeed cable. Operating temperature of -4°F to 125°F SO, 115°F MO, and 108°F HO.


OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination.

FINISHES: All exterior aluminum parts are polyester powder coat painted to meet AAMA 2604 standards. See Structura's finish options for available colors. [Care and Maintenance](#)


HARDWARE: All fasteners are stainless steel unless otherwise noted.

LISTINGS & RATINGS: Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598 and UL Standard 2108. Suitable for wet locations. LM-80 test calculated L70 > 40,000 hours. Luminaire not to be installed in chlorinated environment.

WARRANTY: A 2-year finish warranty with 3-year warranty on LED and driver.

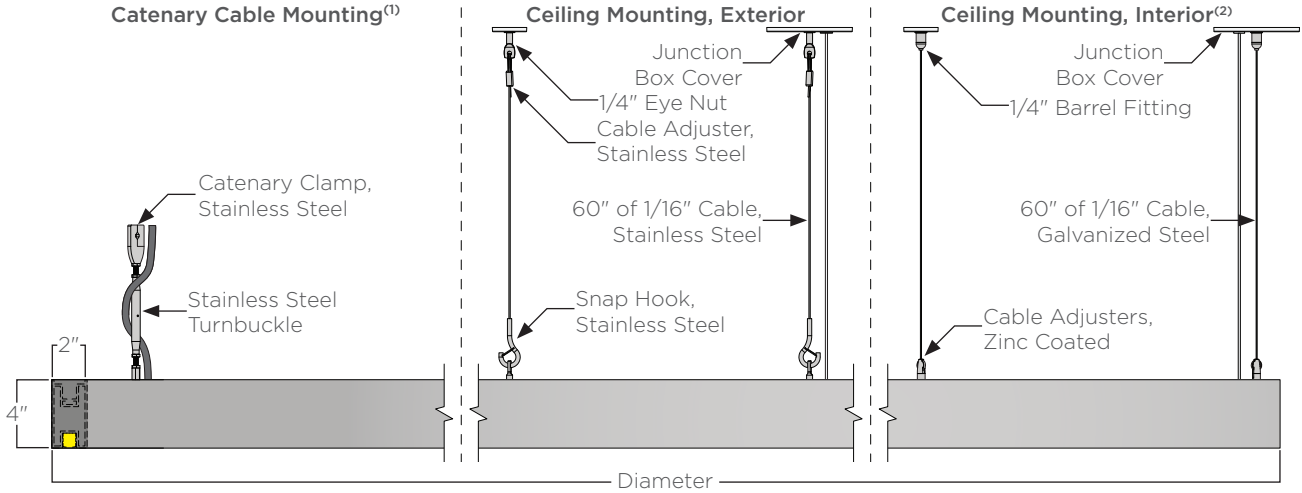

Dia.	Standard Output		Medium Output		High Output		Weight ⁽⁴⁾	EPA ⁽⁴⁾
	Lumens ⁽³⁾	Watts	Lumens ⁽³⁾	Watts	Lumens ⁽³⁾	Watts		
2'	627	9	1139	18	1593	29	16lbs.	1.61ft ²
4'	1299	18	2360	36	3301	60	32lbs.	3.18ft ²
6'	1980	28	3597	55	5032	91	49lbs.	4.78ft ²
8'	2671	37	4851	74	6787	123	64lbs.	6.40ft ²
10'	3361	47	6105	93	8541	155	81lbs.	8.06ft ²
12'	4033	56	7326	110	10249	185	97lbs.	9.65ft ²

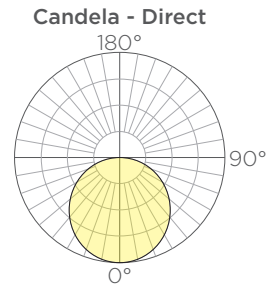


ORDERING GUIDE: EXAMPLE: VOLTA-RNG-D-6-L27MO-S4-CA-STD



VOLTA	RNG	D						
1	2	3	4	5	6	7	8	9


1	Series	4	Diameter⁽⁵⁾	6	Output	8	Mounting
VOLTA	Volta	2	2'	SO	Standard Output	CA	Catenary Cable ⁽¹⁾
		4	4'	MO	Medium Output	CE/E	Ceiling Canopy, Exterior
2	Type	6	6'	HO	High Output	CE/I	Ceiling Canopy, Interior ⁽²⁾
RNG	Ring	8	8'				
		10	10'	7	Metal Finish	9	Special
3	Lighting	12	12'	C*	See color options on finishes technical sheet	STD	Standard
D	Direct	5	CCT	CSM	Custom Color		
		L27	2700K				
		L30	3000K				
		L35	3500K				
		L40	4000K				

1. Catenary cable designed and provided separately.
 2. Interior mounting must be in a location without affect from winds.
 3. Lumen output based upon 3000K CCT.
 4. Weight and EPA based off of catenary mounting option.
 5. Rings 10' diameter and larger will ship as multiple pieces that will need field assembly.

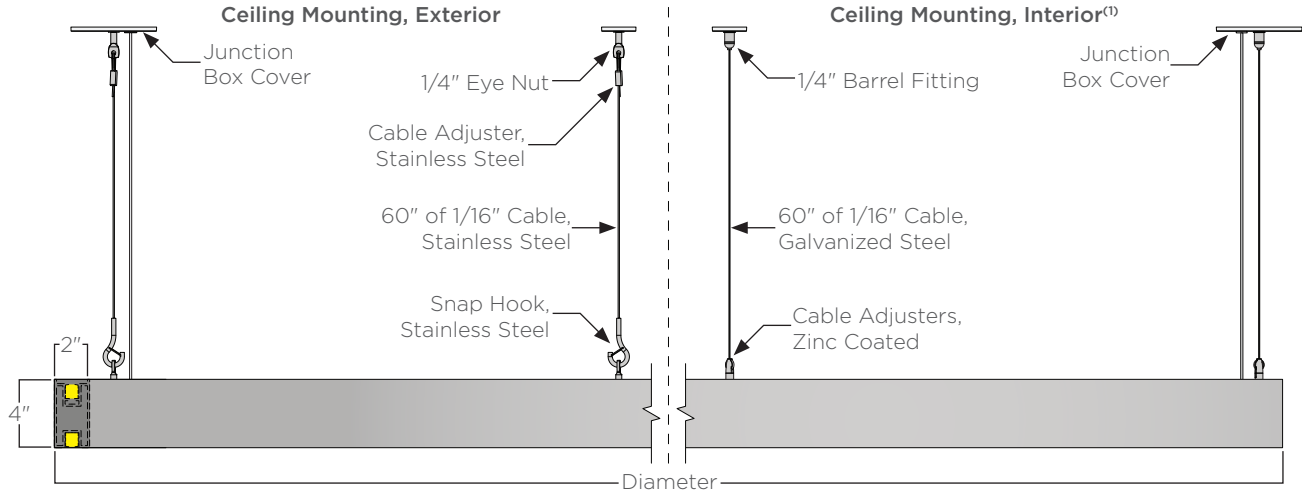

Dia.	Standard Output		Medium Output		High Output		Weight	EPA
	Lumens ⁽²⁾	Watts	Lumens ⁽²⁾	Watts	Lumens ⁽²⁾	Watts		
2'	1217	17	2211	34	3093	56	17lbs.	1.49ft ²
4'	2562	36	4653	71	6510	118	33lbs.	3.06ft ²
6'	3924	54	7128	108	9972	180	50lbs.	4.66ft ²
8'	5268	73	9570	145	13388	242	66lbs.	6.28ft ²
10'	6649	92	12078	183	16897	305	83lbs.	7.88ft ²
12'	7993	110	14520	220	20313	367	99lbs.	9.47ft ²

Candela - Direct/Indirect

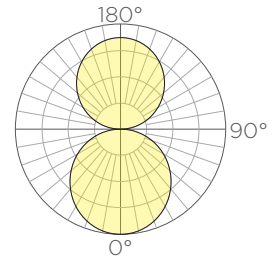


ORDERING GUIDE: EXAMPLE: VOLTA-RNG-D/I-4-L30HO-C4-CE-STD




VOLTA	RNG	D/I					CE	
1	2	3	4	5	6	7	8	9

1	Series	4	Diameter⁽⁴⁾	6	Output	8	Mounting
VOLTA	Volta	2	2'	SO	Standard Output	CE/E	Ceiling Canopy, Exterior
2	Type	4	4'	MO	Medium Output	CE/I	Ceiling Canopy, Interior ⁽¹⁾
RNG	Ring	6	6'	HO	High Output	9	Special
3	Lighting	8	8'	7	Metal Finish	STD	Standard
D/I	Direct/ Indirect ⁽³⁾	10	10'	C*	See color options on finishes technical sheet		
		12	12'	CSM	Custom Color		
		5	CCT				
		L27	2700K				
		L30	3000K				
		L35	3500K				
		L40	4000K				

1. Interior mounting must be in a location without affect from winds.
 2. Lumen output based upon 3000K CCT.
 3. Direct/indirect illumination controlled together. Contact Structura for independant control options.
 4. Rings 10' diameter and larger will ship as multiple pieces that will need field assembly.

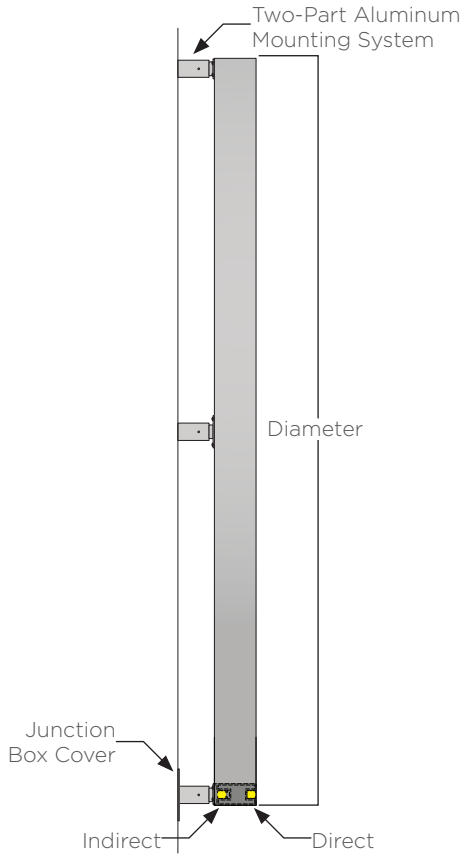

Dia.	Standard Output		Medium Output		High Output		Weight
	Watts D	Watts D/I	Watts D	Watts D/I	Watts D	Watts D/I	
2'	9	17	18	34	29	56	17lbs.
4'	18	36	36	71	60	118	33lbs.
6'	28	54	55	108	91	180	50lbs.

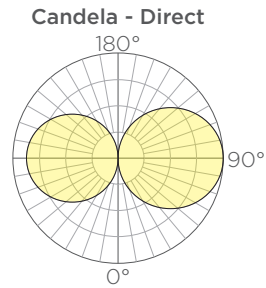

ORDERING GUIDE: EXAMPLE: VOLTA-RNG-I-5-L3050-C3-WA4/C1-STD



VOLTA	RNG					/	
1	2	3	4	5	6	7	8
							9
							10

1	Series
VOLTA	Volta
2	Type
RNG	Ring
3	Lighting
D	Direct
I	Indirect
D/I	Direct/Indirect ⁽¹⁾

4	Diameter
2	2'
4	4'
6	6'
5	CCT
L27	2700K
L30	3000K
L35	3500K
L40	4000K

6	Output
SO	Standard Output
MO	Medium Output
HO	High Output
7	Metal Finish
C*	See color options on finishes technical sheet
CSM	Custom Color

8	Mounting
WA4	4" Wall Mount
WA8	8" Wall Mount
9	Mounting Finish
C*	See color options on finishes technical sheet
CSM	Custom Color
10	Special
STD	Standard

1. Direct/indirect illumination controlled together. Contact Structura for independant control options.