Bol 8' – 24' Round Tapered and Straight Wood Poles

FIXTURE TYPE: _____


PROJECT NAME: _____



Glulam solid wood shaft and aluminum base pole available in 8' – 24' heights

FEATURES:

- Available with straight, tapered, or round to square wood shaft
- Round extruded aluminum pole base with flush handhole cover held with countersunk stainless steel fasteners
- Tenon or drill mount fixture mounting

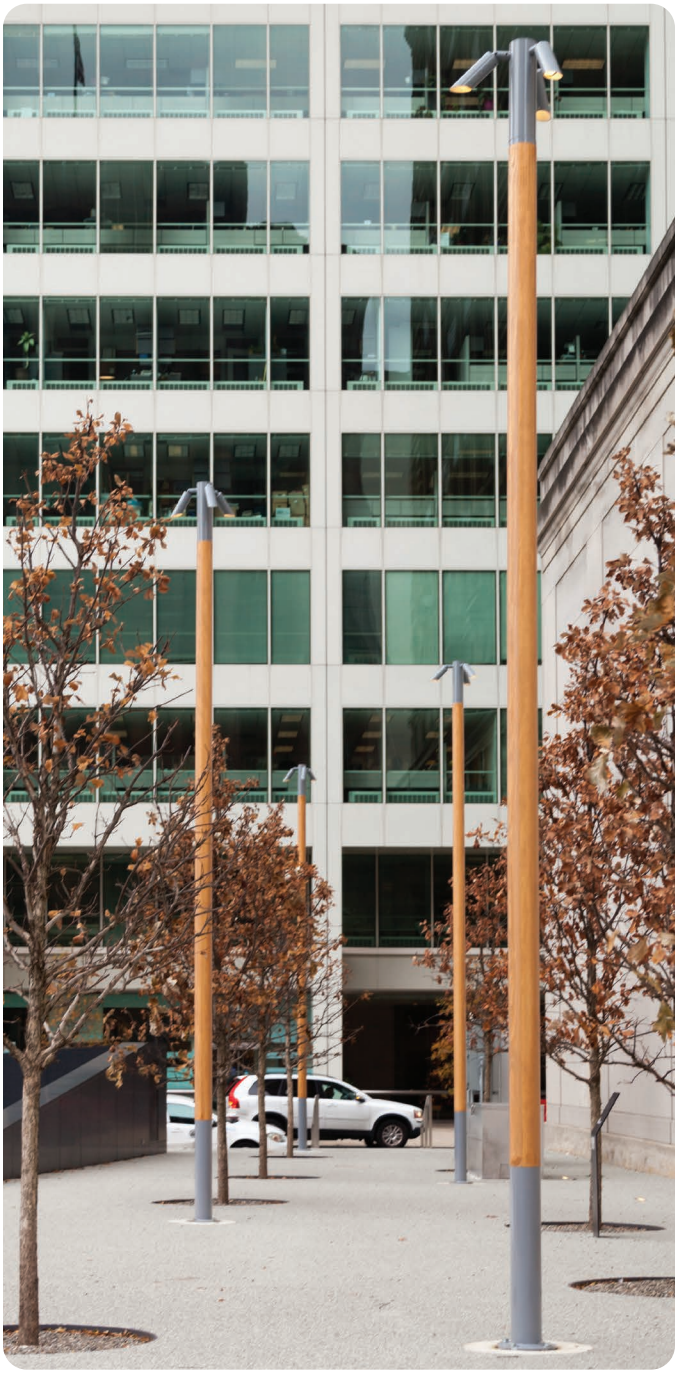

SPECIFICATIONS:

HOUSING: Solid wood pole is assembled through glulam construction and precision machined using CNC technology. An electrical raceway is provided in the pole's center for wiring. Laminations measure no more than 2" in thickness. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, is waterproof and rated for wet or dry use exposure.

Glulam wood shaft is fastened to aluminum pole base welded to a 3/4" thick aluminum anchor bolt base. Anchor bolt kit includes (4) 3/4" hot dip galvanized anchor bolts and fasteners and ridged concrete pour template.


ELECTRICAL: A 5/16" – 18 grounding point is provided on the aluminum pole base. Wireway access is provided through a NEC compliant handhole with a flush, gasketed cover plate.


FINISHES AND MATERIALS: Wood pieces are finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors. All exterior aluminum parts are polyester powder coat painted to AAMA-2604 standards. Care and Maintenance

HARDWARE: All hand hole fasteners and luminaire bracket arm hardware are stainless steel. Anchor bolt kits are ASTM F1554 grade 55 steel with galvanized steel hex nuts and washers.

FIXTURE MOUNTING: Fixtures mount either by 2 3/8", 2 7/8", 3 1/2", or 4" diameter by 4" tall tenon or drill mount for arm brackets. Consult factory for other tenon sizes. Bolt mounted luminaires must use stainless steel hardware.

©2026 STRUCTURA, INC.

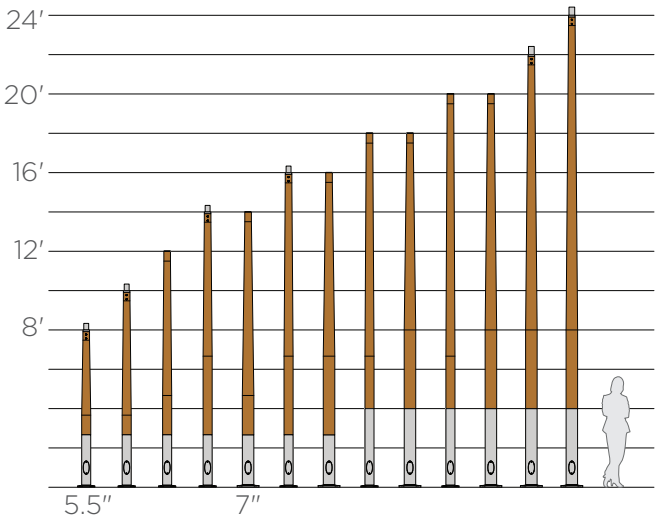

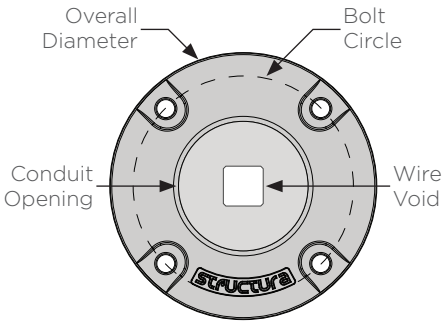

Pole Size	Baseplate Dia.	Bolt Circle	Base Height[1]	Conduit Opening	Wire Void
5.5″	10.5″ Dia.	8.5″ Dia.	32″/48″	5″ Dia.	2″ Sq.
7.0″	13.5″ Dia.	11″ Dia.	32″/48″	6.5″ Dia.	2″ Sq.

ORDERING GUIDE: EXAMPLE: BOL-S-12-55-55-S3-C6-T2384-BD-STD

BOL											STD
1	2	3	4	5	6	7	8	9	10	11	11

1 Series

BOL	Bol

2 Shaft Shape

S	Round Straight
T	Round Tapered
RSQ	Round to Square

3 Height[1]

8	8′
10	10′
12	12′
14	14′
16	16′
18	18′
20	20′
22	22′
24	24′

4 Base Diameter[2]

55	5.5″ – 20′ Maximum Height
70	7.0″ – 24′ Maximum Height

5 Top Diameter

40	4.0″
55	5.5″
70	7.0″

6 Wood Finish

S*	See color options on finishes technical sheet

7 Metal Finish

C*	See color options on finishes technical sheet
CSM	Custom Color

8 Fixture Mounting

Tenon

T2384	2 3/8″ x 4″ Tenon
T2784	2 7/8″ x 4″ Tenon
T3124	3 1/2″ x 4″ Tenon
T4004	4″ x 4″ Tenon
TXXX	Specify diameter and height

Drill

D1	1 Drill Location
D2	2 Drill Locations
D3	3 Drill Locations
D4	4 Drill Locations

9 Options

BABA	BABA
BNR	Banner Arms[3]
GFCI	GFCI Box and Cover

10 Anchor Bolts

BD	Bolt Down Anchors (recommended)
BC	Traditional Anchors with Base Cover

11 Special

STD	Standard

1. Poles with a height 18' and over have a 48" tall base.
2. See wind loading tables for allowable EPA.
3. Consult factory for allowable banner size based upon EPA.

©2026 STRUCTURA, INC.