

FIXTURE TYPE: _____

PROJECT NAME: _____



Aluminum bollard with 360° illumination.

FEATURES:

- Designed for wayfinding and landscape lighting
- Slender upright
- Low profile LED housing

SPECIFICATIONS:

CONSTRUCTION: Casted aluminum baseplate, upright, and LED housing.

ELECTRICAL: Powered by a 120-277VAC primary integral power supply. Operating temperature of -4°F to 122°F.





OPTICAL SYSTEM: LED available in 3000K and 4000K. LED module covered by white opal acrylic. System is 8W.

FINISHES AND MATERIALS: All exterior aluminum parts are polyester powder coat painted to AAMA-2604 standards. [Care and Maintenance](#)

HARDWARE: All hardware is stainless steel. Anchor bolt kit is hot dipped galvanized.

LISTINGS & RATINGS: Luminaire CSA listed according to CSA C22.2 No. 250.0-18/UL Standard 1598. Suitable for wet locations. Ingress protection rating of IP65.



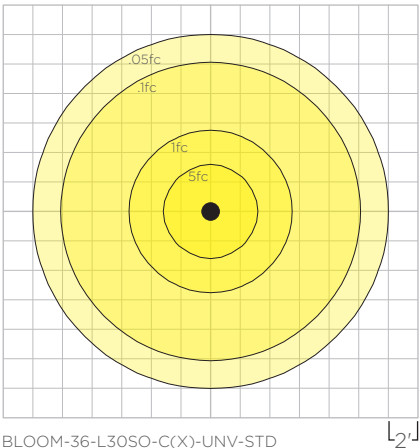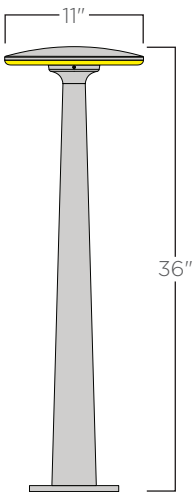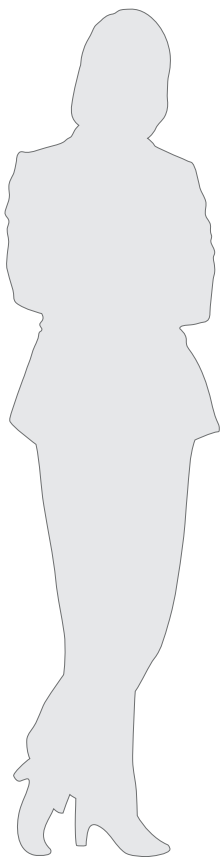

ORDERING GUIDE: EXAMPLE: BLOOM-36-L30SO-C3-UNV-STD



BLOOM					UNV	STD
1	2	3	4	5	6	7

1	Series	4	Light Source	6	Voltage
Bloom	Bloom	SO	Standard Output	UNV	120-277V
2	Height	5	Metal Finish	7	Special
36	36"	C*	See color options on finishes technical sheet	STD	Standard
3	Light Color	CSM	Custom Color		
L30	3000K				
L40	4000K				