

Reverse Tilt Bollard

Illuminated Aluminum Bollard

STRUCTURA

FIXTURE TYPE: _____

PROJECT NAME: _____



Shown with Reverse Tilt pole.

Tilted aluminum bollard with linear LED lighting matching the base details of the Reverse Tilt pole.

FEATURES:

- Smooth, dot free lumination
- Integral power supply
- Multiple static color options and color changing RGB available

SPECIFICATIONS:

CONSTRUCTION: Rectangular extruded 6061-T6 aluminum alloy tubes fastened to square 6061-T6 base support welded to 319SR aluminum alloy baseplate.

ELECTRICAL: Powered by a 90-305VAC primary/24VDC secondary integral power supply. System is 0-10V dimmable. Constructed with a US and Canada UL listed luminaire. Minimum -4°F operating temperature.

OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination. Consult factory for other lumen outputs.


FINISHES AND MATERIALS: Wood pieces are finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors. All exterior aluminum parts are polyester powder coat painted to AAMA-2604 standards. [Care and Maintenance](#)



HARDWARE: All hand hole fasteners and luminaire bracket arm hardware are stainless steel. Anchor bolt kits are ASTM F1554 grade 55 steel with galvanized steel hex nuts and washers.

	Standard Output		Medium Output		High Output	
LED	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts
Front	306	5	561	9	833	15
Back	306	5	561	9	833	15

[IES file download](#)

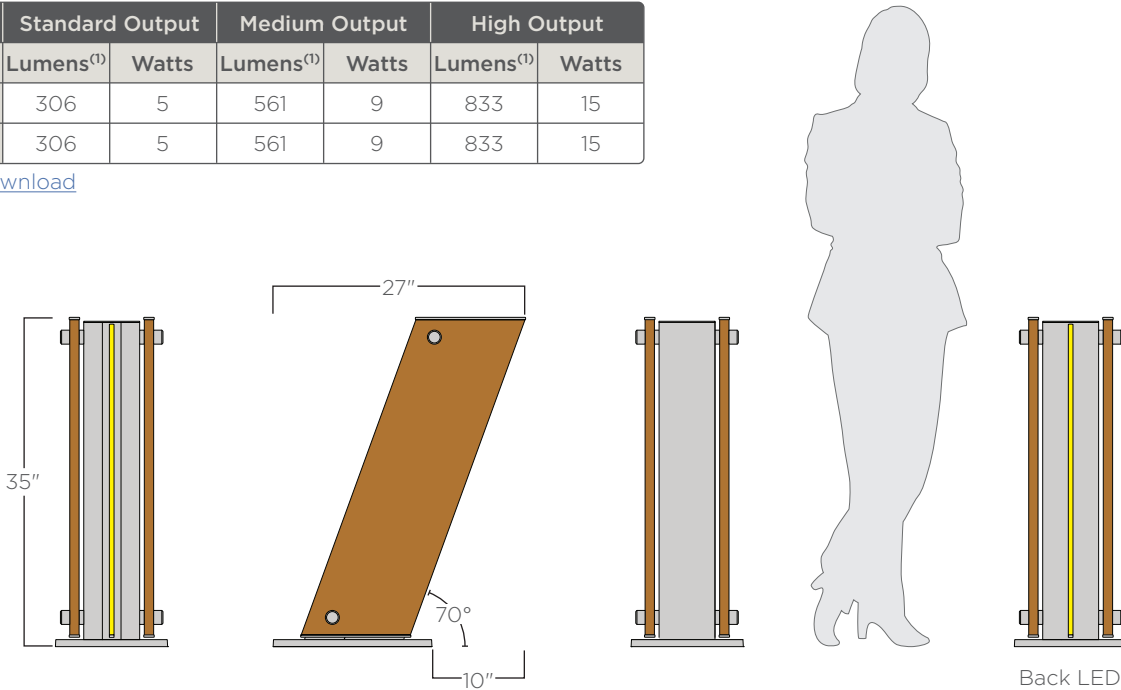

ORDERING GUIDE: EXAMPLE: REV TBL-35-C4-L30MO-UBSO-P1/S4-UNV-BD-STD

REV TBL	35					UNV			STD		
1	2	3	4	5	6	7	8	9	10	11	12

1	Series
REV TBL	Reverse Tilt Bollard
2	Overall Height
35	35"
3	Metal Finish
C*	See color options on finishes technical sheet
CSM	Custom Color
4	Light Color
L27	2700K
L30	3000K
L35	3500K
L40	4000K
AMB	Amber
RED	Red
GRN	Green
BLU	Blue
RGBW/**	Color Changing ⁽²⁾

5	Light Source⁽³⁾
SO	Standard Output
MO	Mid Output
HO	High Output
6	Back LED
UO	No LED
UB	Back LED
7	Back Light Source
SO	Standard Output
MO	Mid Output
HO	High Output
8	Panel Material
P1/S*	Wood (specify color) ⁽⁴⁾
P2/C*	Aluminum (specify color) ⁽⁴⁾
WS	Weathering Steel

9	Voltage
UNV	120-277V
10	Options
GFCI	GFCI Box ⁽⁵⁾
11	Anchor Bolts
BD	Bolt Down Anchors (recommended)
CN	Traditional Anchors with Cap Nuts
12	Special
STD	Standard

1. Lumen output based upon 3000K CCT.
 2. RGBW can be specified with 2700, 3000, 3500, or 4000K. Consult factory for RGBW color control options.
 3. Leave output blank for amber, red, green, blue, and RGB light color options.
 4. See color options on finishes technical sheet.
 5. GFCI box option lowers lumen output of back side LED option.