

FIXTURE TYPE: _____

PROJECT NAME: _____



Slim aluminum skeletal structure and LED housing with wood accents.

FEATURES:

- High power, low wattage LED light source
- Small 4" x 4" footprint
- ADA compliant
- Concealed anchor base and mounting hardware

SPECIFICATIONS:

CONSTRUCTION: Extruded 6061-T6 aluminum alloy bar welded to 6061-T6 structural plates.

Pathlight's welded-in baseplate attaches to the ground via a concrete bolt kit or earth spike with concealed access behind wood accent panel.


ELECTRICAL: LED is 4W and powered by 9-15V AC/DC input voltage. Fixture is internally pre-wired to the electrical splice location in the fixture base.

OPTICAL SYSTEM: LED module available in 2750K for marker and pedestrian versions and 3000K for dual sided and single sided versions.

FINISHES AND MATERIALS: Wood pieces are finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors. All aluminum parts are polyester powder coat painted.

HARDWARE: Fasteners are stainless steel.



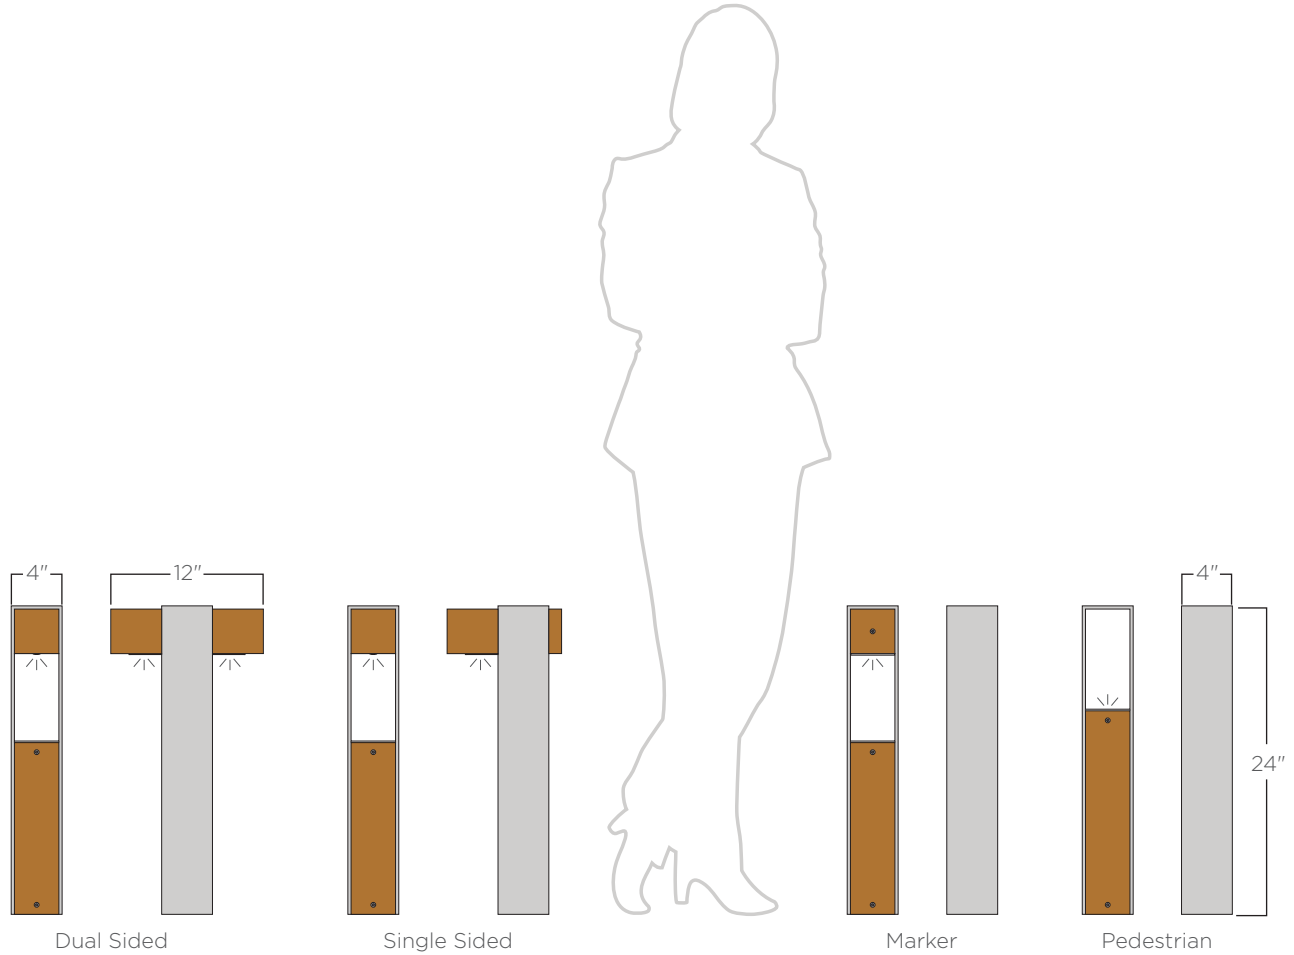

ORDERING GUIDE: EXAMPLE: VIVAT-D-24-C4-S3-12-CB-STD





1	Series	4	Metal Finish	6	Voltage
VIVAT	Vivat	C*	See color options on finishes technical sheet	12	9-15V ⁽¹⁾
2	Fixture Type	CSM	Custom Color	7	Mounting
D	Dual Sided	5	Wood Finish	CB	Concrete Anchor Bolt
S	Single Sided	S*	See color options on finishes technical sheet	ES	Earth Spike
M	Marker			8	Special
P	Pedestrian			STD	Standard
3	Height			MOD	Modified
24	24"				

1. Consult factory for remote driver options.

FIXTURE TYPE: _____



PROJECT NAME: _____

VIVAT-DUAL SIDED

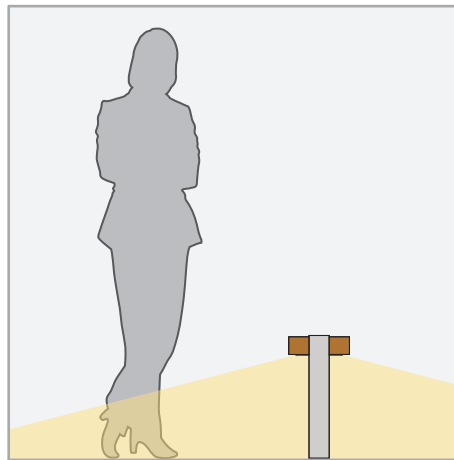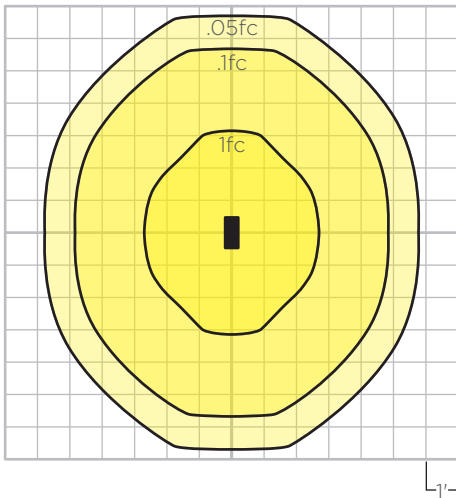

LED lighting facts [®]		STRUCTURA, INC.
A Program of the U.S. DOE		
Light Output (Lumens)	140	
Watts	3.5	
Lumens per Watt (Efficacy)	40	
Color Accuracy Color Rendering Index (CRI)	75	
Light Color Correlated Color Temperature (CCT)	3000 (Bright White)	
<small>All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.</small>		
<small>Visit www.lightingfacts.com for the Label Reference Guide.</small>		
<small>Registration Number: S8XA-SJ2G6K (1/15/2016)</small>		
<small>Model Number: VIVAT-D-24-XX-XX-12-XX-STD</small>		
<small>Type: Luminaire - Bollard</small>		

VIVAT-MARKER

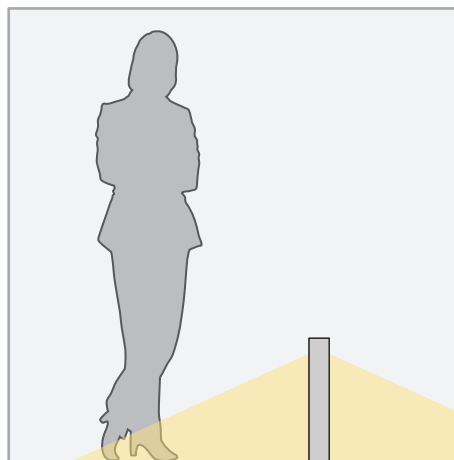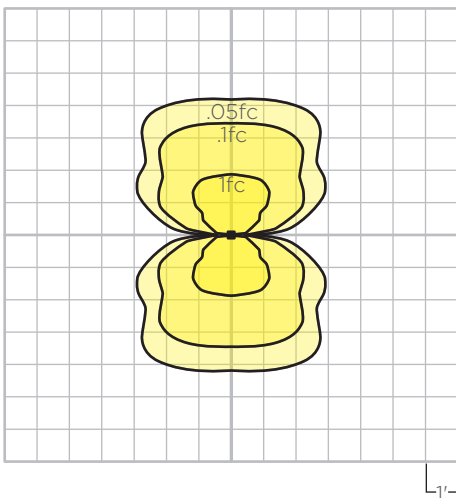

LED lighting facts [®]		STRUCTURA, INC.
A Program of the U.S. DOE		
Light Output (Lumens)	54	
Watts	3.55	
Lumens per Watt (Efficacy)	15.38	
Color Accuracy Color Rendering Index (CRI)	83	
Light Color Correlated Color Temperature (CCT)	2700 (Warm White)	
<small>All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.</small>		
<small>Visit www.lightingfacts.com for the Label Reference Guide.</small>		
<small>Registration Number: S8XA-X8522J (1/15/2016)</small>		
<small>Model Number: VIVAT-M-24-XX-XX-12-XX-STD</small>		
<small>Type: Luminaire - Bollard</small>		