

Aura **Illuminated Wooden Linear Pendant**

FIXTURE TYPE: _____

PROJECT NAME: _____



Solid wood exterior/interior LED linear pendant.

FEATURES:

- Available in 2' to 12' lengths
- >90CRI smooth, dot free illumination
- Dimmable IP67 power supply and IP67 luminaire
- Catenary cable, ceiling, and wall mounting options

SPECIFICATIONS:

HOUSING: Solid Accoya wood linear assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, waterproof, and rated for wet or dry use exposure.

ELECTRICAL: Powered by a 90-305VAC primary/24VDC secondary remote dimmable power supply. Driver features built-in short circuit, over temperature, over voltage, and over current. System is 1-10V dimming. Catenary mounted fixtures supplied with 1' infeed cable. A 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6' infeed cable. Constructed with a US and Canada UL listed luminaire.


OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination. Operating temperature of -13°F to 125°F SO, 115°F MO, and 108°F HO.

FINISHES AND MATERIALS: Wood is finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors.


HARDWARE: All fasteners and non-wood components are stainless steel unless otherwise noted.

WARRANTY: 25-year wood warranty with a 5-year finish warranty. 3-year warranty on LED and driver.


Aura Linear - Direct Lighting

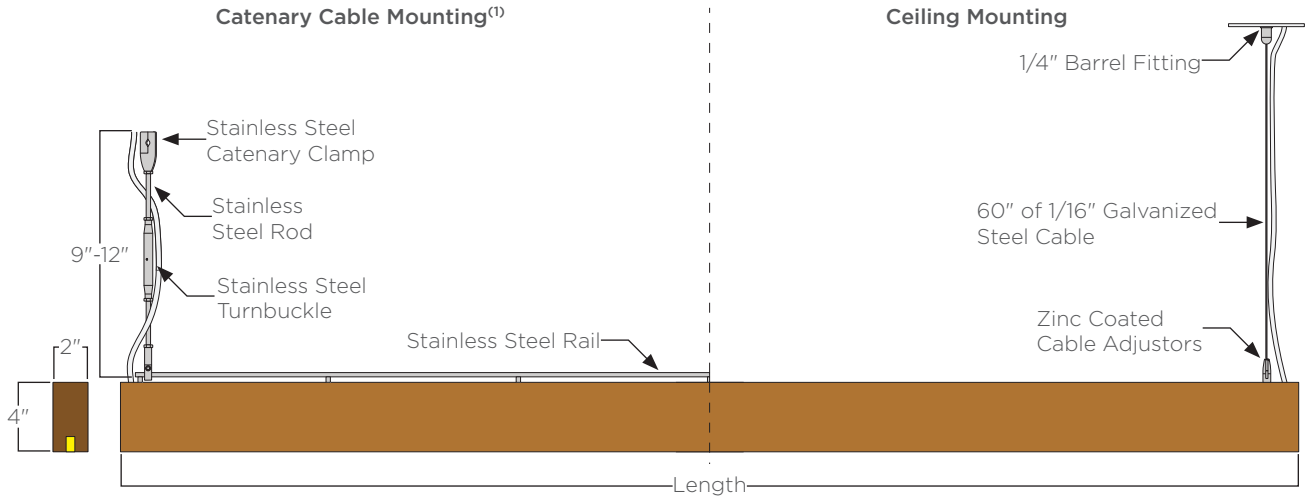

Length	Standard Output		Medium Output		High Output		Weight ⁽³⁾	EPA ⁽³⁾
	Lumens ⁽²⁾	Watts	Lumens ⁽²⁾	Watts	Lumens ⁽²⁾	Watts		
2'	216	3	396	6	588	10	6lbs.	.90ft ²
4'	432	6	792	12	1176	20	11lbs.	1.70ft ²
6'	648	9	1182	18	1764	30	15lbs.	2.50ft ²
8'	864	12	1584	24	2352	40	20lbs.	3.30ft ²
10'	1080	15	1980	30	2940	50	25lbs.	4.10ft ²
12'	1296	18	2376	36	3528	60	29lbs.	4.90ft ²

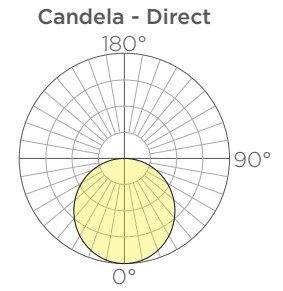


ORDERING GUIDE: EXAMPLE: AURA-LNR-D-6-L30HO-S3-CA-OF2-STD




1	Series	4	Length	6	Output	9	Outfeed⁽⁴⁾
AURA	Aura	2	2'	SO	Standard Output	BLANK	No Outfeed
2	Series	4	4'	MO	Medium Output	OF	1' Outfeed
LNR	Linear	6	6'	HO	High Output	OF2	Outfeed + 2' Jumper
3	Lighting	8	8'	7	Wood Finish	OF4	Outfeed + 4' Jumper
D	Direct	10	10'	S*	See color options on finishes technical sheet	OF*	Outfeed + X' Jumper
		12	12'	8	Mounting	10	Special
		L27	2700K	CA	Catenary Cable	STD	Standard
		L30	3000K	CE	Ceiling Canopy	MOD	Modified
		L35	3500K				
		L40	4000K				

1. Catenary cable designed and provided separately.
 2. Lumen output based upon 3000K CCT.
 3. Weight and EPA based off of catenary mounting option.
 4. Out feed option for daisy chain applications with master and satellite control. Maximum total run distance per power supply: 66' for SO, 33' for MO, and 20' for HO.

Aura Linear - Direct/Indirect Lighting

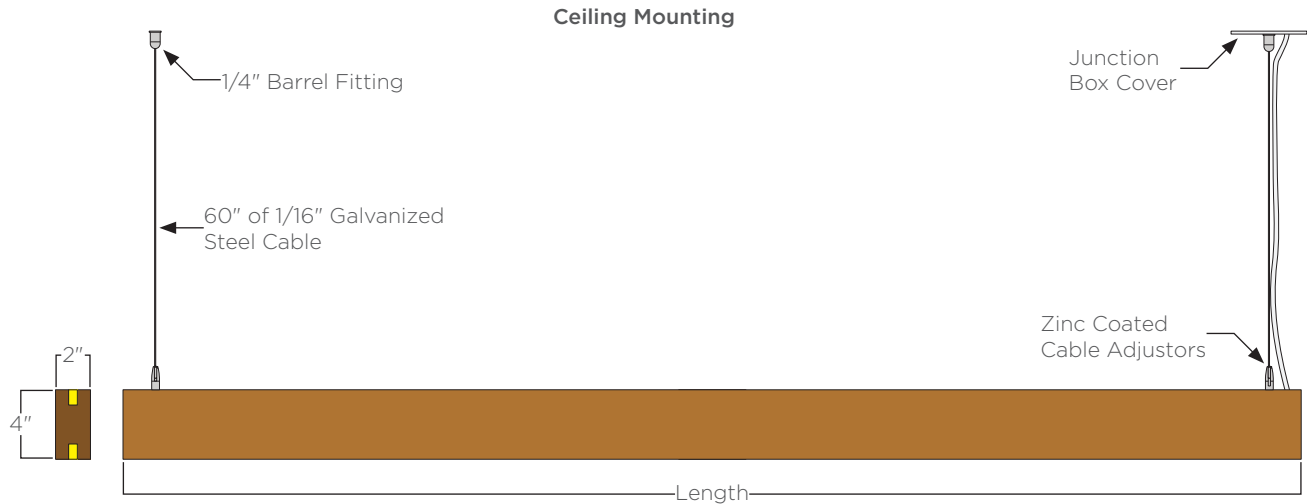

Length	Standard Output		Medium Output		High Output		Weight	EPA
	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts		
2'	414	6	759	12	1127	20	5lbs.	.84ft ²
4'	846	12	1551	24	2302	40	10lbs.	1.64ft ²
6'	1278	18	2343	36	3479	60	14lbs.	2.44ft ²
8'	1710	24	3135	48	4655	80	19lbs.	3.24ft ²
10'	2142	30	3927	60	5831	100	24lbs.	4.04ft ²
12'	2574	36	4719	72	7007	120	28lbs.	4.84ft ²

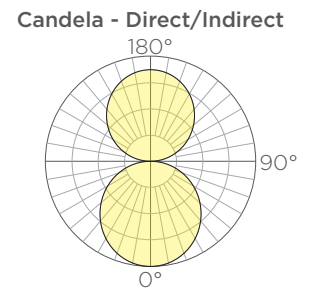


ORDERING GUIDE: EXAMPLE: AURA-LNR-D/I-8-L35MO-S6-CE-STD




1	Series	4	Length	6	Output	8	Mounting
AURA	Aura	2	2'	SO	Standard Output	CE	Ceiling Canopy
2	Series	4	4'	MO	Medium Output		
LNR	Linear	6	6'	HO	High Output		
3	Lighting	8	8'	7	Wood Finish	9	Special
D/I	Direct/ Indirect	10	10'	S*	See color options on finishes technical sheet	STD	Standard
		12	12'			MOD	Modified
		5	CCT				
		L27	2700K				
		L30	3000K				
		L35	3500K				
		L40	4000K				

1. Lumen output based upon 3000K CCT.

Aura Linear - Wall Mount

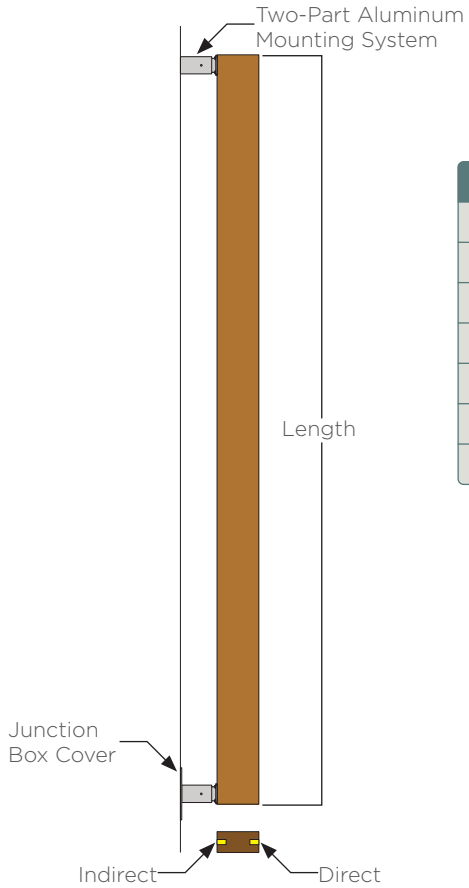

Length	Standard Output		Medium Output		High Output		Weight
	Watts D	Watts D/I	Watts D	Watts D/I	Watts D	Watts D/I	
2'	3	6	6	12	10	20	7lbs.
4'	6	12	12	24	20	40	12lbs.
6'	9	18	18	36	30	60	16lbs.
8'	12	24	24	48	40	80	21lbs.
10'	15	30	30	60	50	100	26lbs.
12'	18	36	36	72	60	120	30lbs.

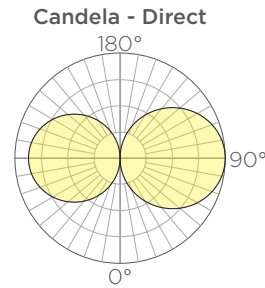


ORDERING GUIDE: EXAMPLE: AURA-LNR-D/I-8-L3550-53-C1-WA4-STD




AURA	LNR								
1	2	3	4	5	6	7	8	9	10

1 AURA	Series Aura	4 2 4 6 8 10 12	Length 2' 4' 6' 8' 10' 12'	6 SO MO HO	Output Standard Output Medium Output High Output	9 WA4 WA8	Mounting 4" Wall Mount 8" Wall Mount
2 LNR	Series Linear	5 L27 L30 L35 L40	CCT 2700K 3000K 3500K 4000K	7 S*	Wood Finish See color options on finishes technical sheet	10 STD MOD	Special Standard Modified
3 D I D/I	Lighting Direct Indirect Direct/ Indirect			8 **** CSM	Metal Finish See color options on finishes technical sheet Custom Color		

Aura Linear - Wall Grazer

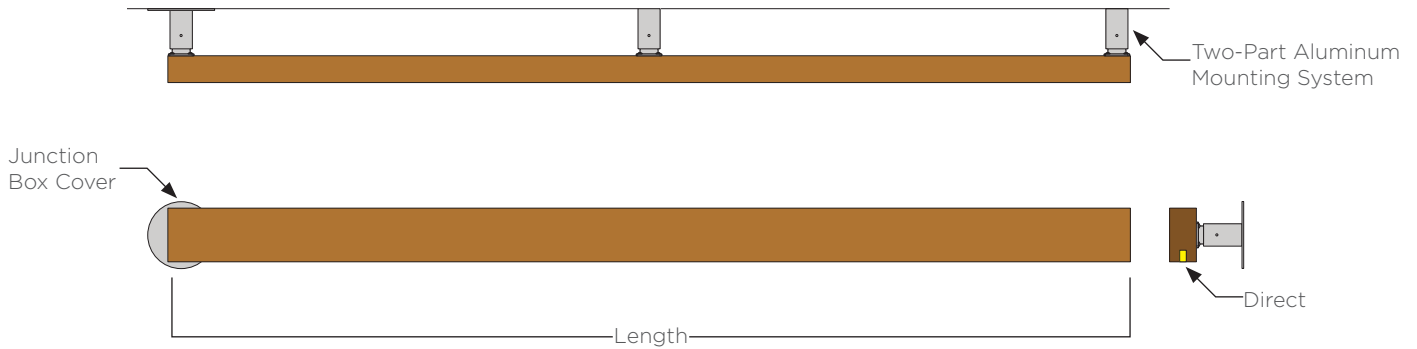

Length	Standard Output		Medium Output		High Output		Weight
	Lumens	Watts	Lumens	Watts	Lumens	Watts	
2'	216	3	396	6	588	10	7lbs.
4'	432	6	792	12	1176	20	12lbs.
6'	648	9	1182	18	1764	30	17lbs.
8'	864	12	1584	24	2352	40	22lbs.
10'	1080	15	1980	30	2940	50	27lbs.
12'	1296	18	2376	36	3528	60	31lbs.

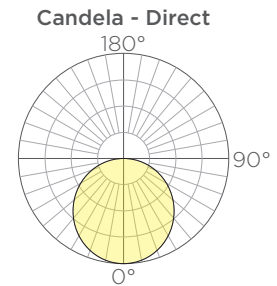

ORDERING GUIDE: EXAMPLE: AURA-LNR-D-6-L35MO-S7-C7-GZ4-STD



AURA	LNR	D							
1	2	3	4	5	6	7	8	9	10

1 AURA	Series Aura	4 2 4 6 8 10 12	Length 2' 4' 6' 8' 10' 12'	6 SO MO HO	Output Standard Output Medium Output High Output	9 GZ4 GZ8	Mounting 4" Grazer Mount 8" Grazer Mount
2 LNR	Series Linear	5	CCT 2700K 3000K 3500K 4000K	7 S*	Wood Finish See color options on finishes technical sheet	10 STD MOD	Special Standard Modified
3 D	Lighting Direct			8 **** CSM	Metal Finish See color options on finishes technical sheet Custom Color		

Aura Linear - Direct Lighting

Outfeed Option

