

# Aura Illuminated Wooden Ring Pendant

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



Solid wood exterior/interior LED round pendant.

## FEATURES:

- Available in 2' to 12' diameters
- >90CRI smooth, dot free illumination
- Dimmable IP67 power supply and IP67 luminaire
- Catenary cable, ceiling, and wall mounting options

## SPECIFICATIONS:

**HOUSING:** Solid Accoya wood linear assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, waterproof, and rated for wet or dry use exposure.

**ELECTRICAL:** Powered by a 90-305VAC primary/24VDC secondary remote dimmable power supply. Driver features built-in short circuit, over temperature, over voltage, and over current. System is 1-10V dimming. Catenary mounted fixtures supplied with 1' infeed cable. A 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6' infeed cable. Constructed with a US and Canada UL listed luminaire.


**OPTICAL SYSTEM:** Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination. Operating temperature of -13°F to 125°F SO, 115°F MO, and 108°F HO.

**FINISHES AND MATERIALS:** Wood is finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors.


**HARDWARE:** All fasteners and non-wood components are stainless steel unless otherwise noted.

**WARRANTY:** 25-year wood warranty with a 5-year finish warranty. 3-year warranty on LED and driver.

# Aura Ring - Direct Lighting

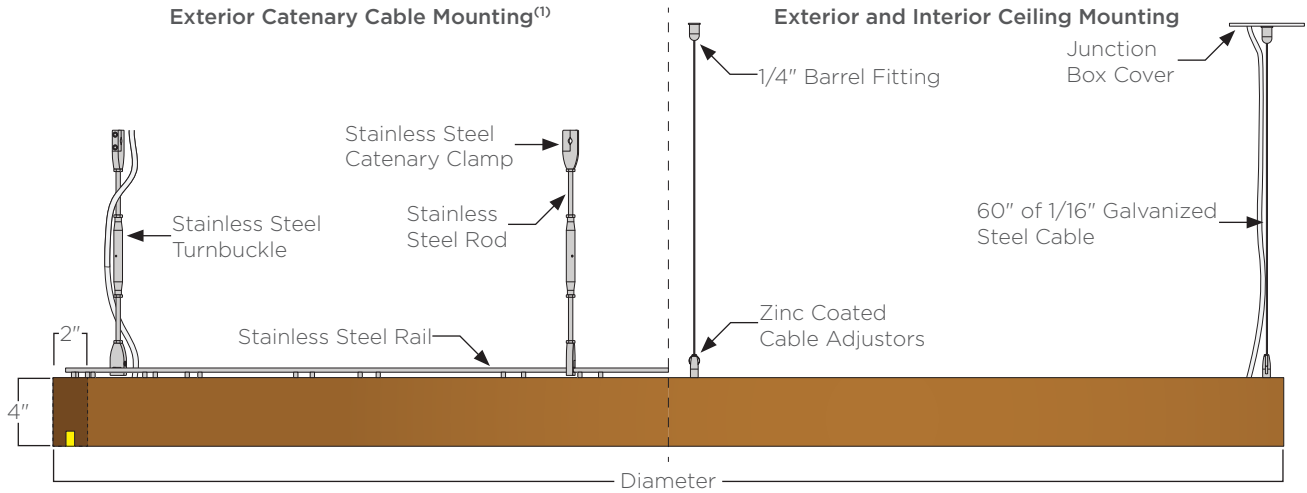

Dia.	Standard Output		Medium Output		High Output		Weight <sup>(3)</sup>	EPA <sup>(3)</sup>
	Lumens <sup>(2)</sup>	Watts	Lumens <sup>(2)</sup>	Watts	Lumens <sup>(2)</sup>	Watts		
2'	627	9	1139	18	1593	29	17lbs.	.69ft <sup>2</sup>
3'	936	13	1700	26	2378	43	25lbs.	.95ft <sup>2</sup>
4'	1299	18	2360	36	3301	60	32lbs.	1.24ft <sup>2</sup>
5'	1662	23	3020	46	4224	77	41lbs.	1.52ft <sup>2</sup>
6'	1980	28	3597	55	5032	91	47lbs.	1.81ft <sup>2</sup>
8'	2671	37	4851	74	6787	123	64lbs.	2.36ft <sup>2</sup>
10'	3361	47	6105	93	8541	155	80lbs.	2.92ft <sup>2</sup>
12'	4033	56	7326	110	10249	185	96lbs.	3.48ft <sup>2</sup>

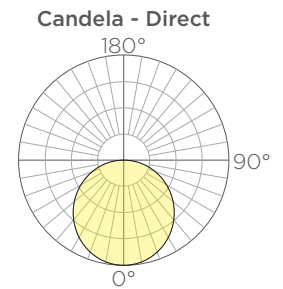


## ORDERING GUIDE: EXAMPLE: AURA-RNG-D-6-L27MO-S4-CA-STD




<b>1</b>	<b>Series</b>	<b>4</b>	<b>Diameter<sup>(4)</sup></b>	<b>5</b>	<b>CCT</b>	<b>7</b>	<b>Wood Finish</b>
<b>AURA</b>	Aura	<b>2</b>	2'	<b>L27</b>	2700K	<b>S*</b>	See color options on finishes technical sheet
<b>2</b>	<b>Series</b>	<b>3</b>	3'	<b>L30</b>	3000K	<b>8</b>	<b>Mounting</b>
<b>RNG</b>	Ring	<b>4</b>	4'	<b>L35</b>	3500K	<b>CA</b>	Catenary Cable
<b>3</b>	<b>Lighting</b>	<b>5</b>	5'	<b>L40</b>	4000K	<b>CE</b>	Ceiling Canopy
<b>D</b>	Direct	<b>6</b>	6'	<b>6</b>	<b>Output</b>	<b>9</b>	<b>Special</b>
		<b>8</b>	8'	<b>SO</b>	Standard Output	<b>STD</b>	Standard
		<b>10</b>	10'	<b>MO</b>	Medium Output	<b>MOD</b>	Modified
		<b>12</b>	12'	<b>HO</b>	High Output		

1. Catenary cable designed and provided separately.  
 2. Lumen output based upon 3000K CCT.  
 3. Weight and EPA based off of catenary mounting option.  
 4. Rings 8' diameter and larger will ship as multiple pieces and will need field assembly

# Aura Ring - Direct/Indirect Lighting

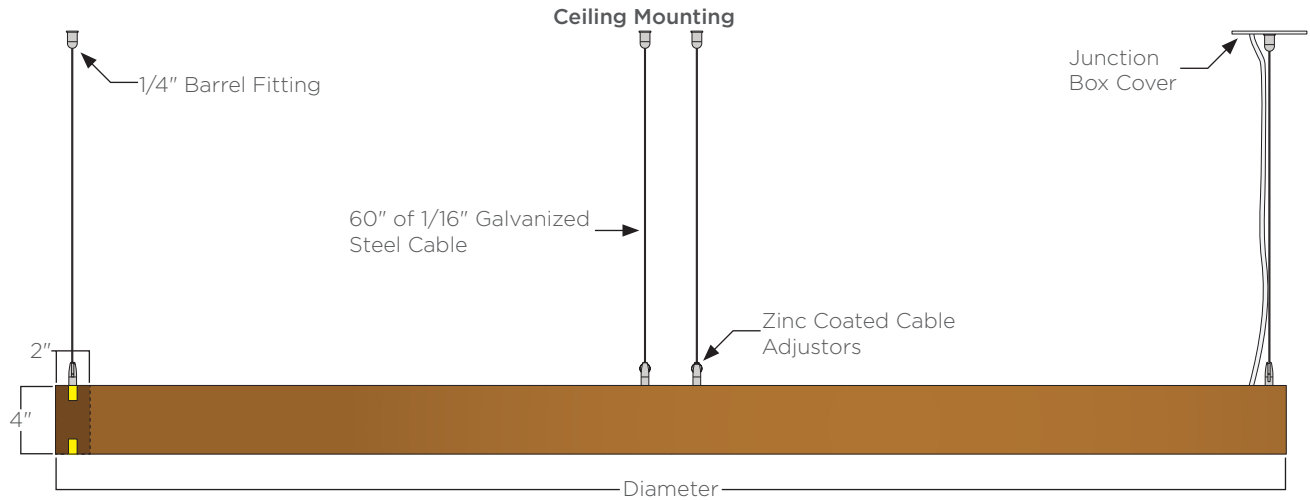

Dia.	Standard Output		Medium Output		High Output		Weight	EPA
	Lumens <sup>(1)</sup>	Watts	Lumens <sup>(1)</sup>	Watts	Lumens <sup>(1)</sup>	Watts		
2'	1217	17	2211	34	3093	56	15lbs.	.57ft <sup>2</sup>
3'	1835	26	3333	51	4663	85	23lbs.	.84ft <sup>2</sup>
4'	2562	36	4653	71	6510	118	30lbs.	1.13ft <sup>2</sup>
5'	3288	46	5973	91	8356	151	39lbs.	1.41ft <sup>2</sup>
6'	3924	54	7128	108	9972	180	45lbs.	1.69ft <sup>2</sup>
8'	5268	73	9570	145	13388	242	60lbs.	2.24ft <sup>2</sup>
10'	6649	92	12078	183	16897	305	75lbs.	2.81ft <sup>2</sup>
12'	7993	110	14520	220	20313	367	90lbs.	3.39ft <sup>2</sup>

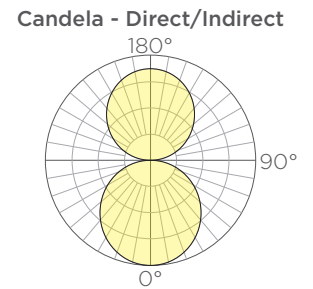

**ORDERING GUIDE:** EXAMPLE: AURA-RNG-D/I-4-L30HO-54-CE-STD




<b>AURA</b>	<b>RNG</b>	<b>D/I</b>					<b>CE</b>	
1	2	3	4	5	6	7	8	9

<b>1</b>	<b>Series</b>	<b>4</b>	<b>Diameter<sup>(2)</sup></b>	<b>5</b>	<b>CCT</b>	<b>7</b>	<b>Wood Finish</b>
<b>AURA</b>	Aura	<b>2</b>	2'	<b>L27</b>	2700K	<b>S*</b>	See color options on finishes technical sheet
<b>2</b>	<b>Series</b>	<b>3</b>	3'	<b>L30</b>	3000K	<b>8</b>	<b>Mounting</b>
<b>RNG</b>	Ring	<b>4</b>	4'	<b>L35</b>	3500K	<b>CE</b>	Ceiling Canopy
<b>3</b>	<b>Lighting</b>	<b>5</b>	5'	<b>L40</b>	4000K	<b>9</b>	<b>Special</b>
<b>D/I</b>	Direct/Indirect	<b>6</b>	6'	<b>SO</b>	<b>Output</b>	<b>STD</b>	Standard
		<b>8</b>	8'	<b>MO</b>	Standard Output	<b>MOD</b>	Modified
		<b>10</b>	10'	<b>HO</b>	Medium Output		
		<b>12</b>	12'		High Output		


1. Lumen output based upon 3000K CCT.

2. Rings 8' diameter and larger will ship as multiple pieces and will need field assembly

# Aura Ring - Wall Mounting

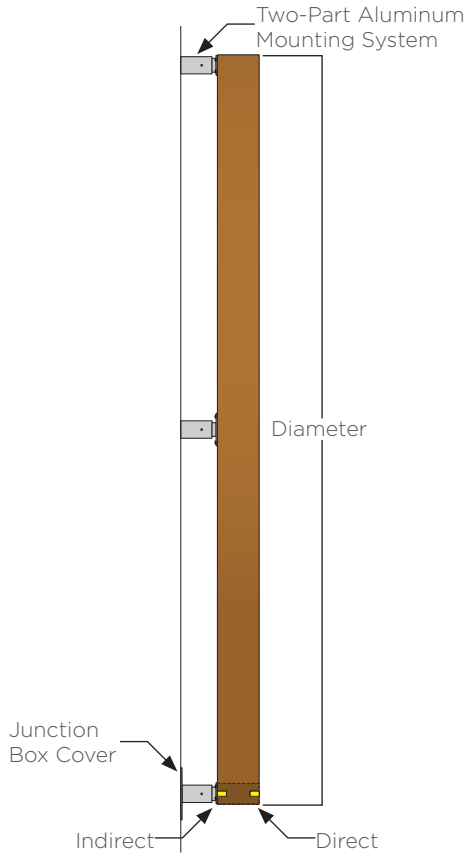

Dia.	Standard Output		Medium Output		High Output		Weight
	Watts D	Watts D/I	Watts D	Watts D/I	Watts D	Watts D/I	
2'	9	17	18	34	29	56	7lbs.
3'	13	23	26	51	43	85	12lbs.
4'	18	36	36	71	60	118	16lbs.
5'	23	46	46	91	77	151	21lbs.
6'	28	54	55	108	91	180	26lbs.

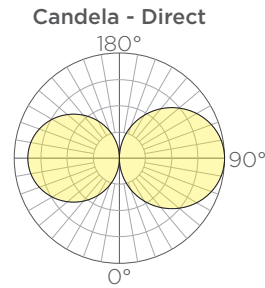

**ORDERING GUIDE:** EXAMPLE: AURA-RNG-I-5-L3050-S2-C4-WA4-STD



<b>AURA</b>	<b>RNG</b>								
1	2	3	4	5	6	7	8	9	10

<b>1</b> <b>AURA</b>	<b>Series</b> Aura	<b>4</b> <b>2</b> <b>3</b> <b>4</b> <b>5</b> <b>6</b>	<b>Diameter</b> 2' 3' 4' 5' 6'	<b>6</b> <b>SO</b> <b>MO</b> <b>HO</b>	<b>Output</b> Standard Output Medium Output High Output	<b>9</b> <b>WA4</b> <b>WA8</b>	<b>Mounting</b> 4" Wall Mount 8" Wall Mount
<b>2</b> <b>RNG</b>	<b>Series</b> Ring	<b>5</b> <b>L27</b> <b>L30</b> <b>L35</b> <b>L40</b>	<b>CCT</b> 2700K 3000K 3500K 4000K	<b>7</b> <b>S*</b>	<b>Wood Finish</b> See color options on finishes technical sheet	<b>10</b> <b>STD</b> <b>MOD</b>	<b>Special</b> Standard Modified
<b>3</b> <b>D</b> <b>I</b> <b>D/I</b>	<b>Lighting</b> Direct Indirect Direct/ Indirect			<b>8</b> <b>****</b> <b>CSM</b>	<b>Metal Finish</b> See color options on finishes technical sheet Custom Color		