

Aura Illuminated Wooden Square and Rectangle Pendant

FIXTURE TYPE: _____

PROJECT NAME: _____



Solid wood exterior/interior LED rectangular pendant.

FEATURES:

- Available in a wide variety of sizes
- >90CRI smooth, dot free illumination
- Dimmable IP67 power supply and IP67 luminaire
- Catenary cable, ceiling, and wall mounting options

SPECIFICATIONS:

HOUSING: Solid Accoya wood linear assembled through glulam construction and precision machined using CNC technology. Adhesive complies with ASTM D-2559 glulam construction specifications for extreme exposed weather conditions, waterproof, and rated for wet or dry use exposure.

ELECTRICAL: Powered by a 90-305VAC primary/24VDCsecondary remote dimmable power supply. Driver features built-in short circuit, over temperature, over voltage, and over current. System is 1-10V dimming. Catenary mounted fixtures supplied with 1' infeed cable. A 40' leader cable supplied with infeed only fixtures. Ceiling canopy mounted fixtures supplied with 6' infeed cable. Constructed with a US and Canada UL listed luminaire.


OPTICAL SYSTEM: Available in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination. Consult factory for other lumen outputs. Operating temperature of -40°F to 131°F.

FINISHES AND MATERIALS: Wood is finished with a low VOC waterborne matte exterior finish containing UV and mildew inhibitors.


HARDWARE: All fasteners and non-wood components are stainless steel unless otherwise noted.

WARRANTY: 25-year wood warranty with a 5-year finish warranty. 3-year warranty on LED and driver.

Aura Square and Rectangle - Direct Lighting

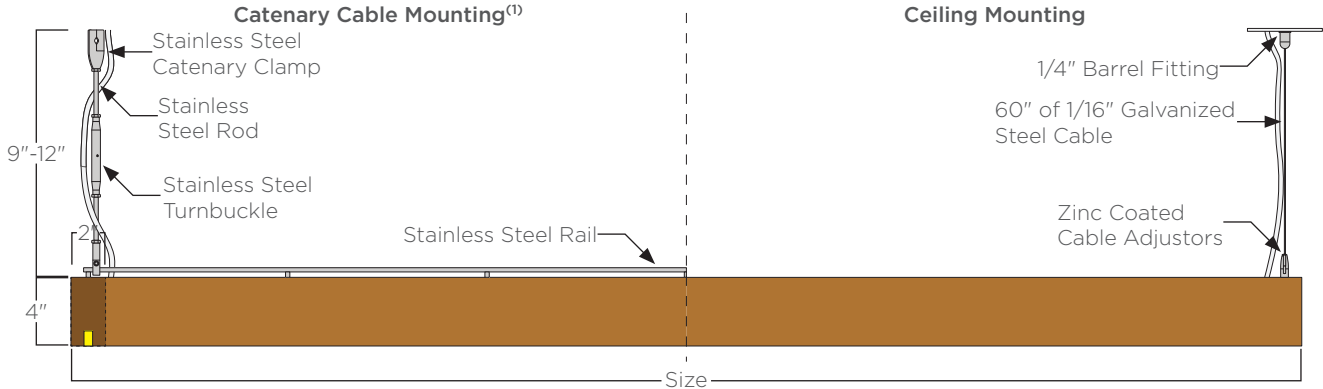

Size	Standard Output		Medium Output		High Output		Weight ⁽²⁾	EPA ⁽²⁾
	Lumens ⁽²⁾	Watts	Lumens ⁽²⁾	Watts	Lumens ⁽²⁾	Watts		
1x4	1080	15	1980	30	2940	50	26lbs.	1.73ft ²
1x6	1512	21	2772	42	4116	70	35lbs.	2.53ft ²
2x2	864	12	1584	24	2352	40	21lbs.	.93ft ²
2x4	1296	18	2376	36	3528	60	31lbs.	1.73ft ²
2x6	1728	24	3168	48	4704	80	40lbs.	2.53ft ²
2x8	2160	30	3960	60	5880	100	50lbs.	3.33ft ²
3x3	1296	18	2376	36	3528	60	31lbs.	1.33ft ²
3x6	1944	27	3564	54	5292	90	45lbs.	2.53ft ²
4x4	1728	24	3168	48	4704	80	40lbs.	1.73ft ²
4x8	2592	36	4752	72	7056	120	59lbs.	3.33ft ²
5x5	2160	30	3960	60	5880	100	50lbs.	2.06ft ²
6x6	2592	36	4752	72	7056	120	59lbs.	2.53ft ²

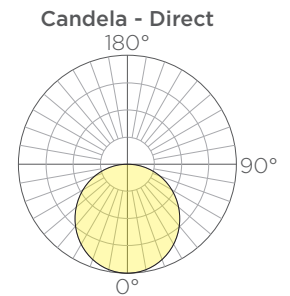

ORDERING GUIDE: EXAMPLE: AURA-RCT-D-2x8-L30MO-S3-CA-STD




AURA		D						
1	2	3	4	5	6	7	8	9


1	Series Aura	4	Size 1' x 4' 1' x 6' 2' x 2' 2' x 4' 2' x 6' 2' x 8' 3' x 3' 3' x 6' 4' x 4' 4' x 8' 5' x 5' 6' x 6'	5	CCT 2700K 3000K 3500K 4000K	7	Wood Finish See color options on finishes technical sheet
2	Series Square Rectangle	3	Lighting Direct	6	Output Standard Output Medium Output High Output	8	Mounting Catenary Cable Ceiling Canopy
SQR RCT				SO MO HO		9	Special Standard Modified
CA CE						STD MOD	

1. Catenary cable designed and provided separately.
 2. Lumen output based upon 3000K CCT.
 3. Weight and EPA based off of catenary mounting option.

Aura Square and Rectangle - Direct/Indirect Lighting

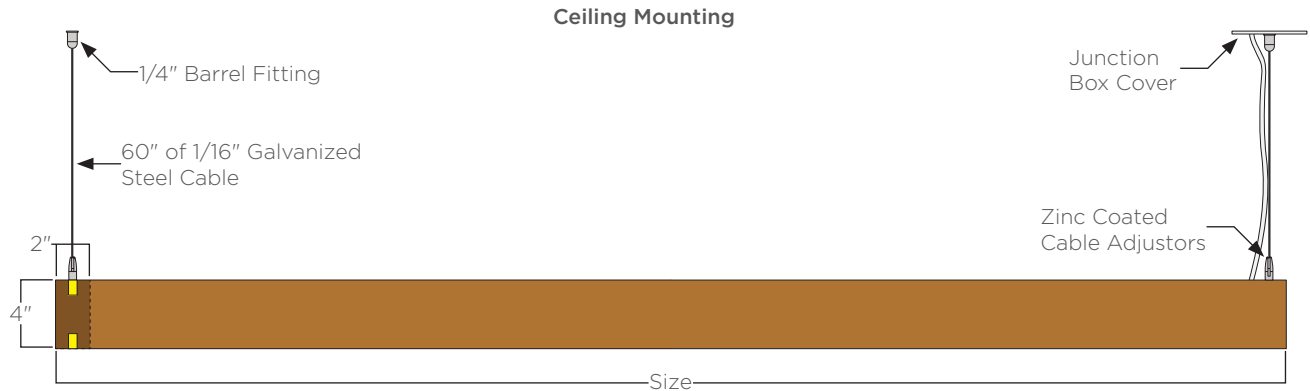

Size	Standard Output		Medium Output		High Output		Weight	EPA
	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts		
1x4	2016	28	3696	56	5488	94	24lbs.	1.68ft ²
1x6	2880	40	5280	80	7840	134	33lbs.	2.48ft ²
2x2	1584	22	2904	44	4312	74	19lbs.	.88ft ²
2x4	2448	34	4488	68	6664	114	29lbs.	1.68ft ²
2x6	3312	46	6072	92	9016	154	38lbs.	2.48ft ²
2x8	4176	58	7656	116	11368	194	48lbs.	3.28ft ²
3x3	2448	34	4488	68	6664	114	29lbs.	1.28ft ²
3x6	3744	52	6864	104	10192	174	43lbs.	2.48ft ²
4x4	3312	46	6072	92	9016	154	38lbs.	1.68ft ²
4x8	5040	70	9240	140	13720	234	57lbs.	3.28ft ²
5x5	4176	58	7656	116	11368	194	48lbs.	2.01ft ²
6x6	5040	70	9240	140	13720	234	57lbs.	2.48ft ²

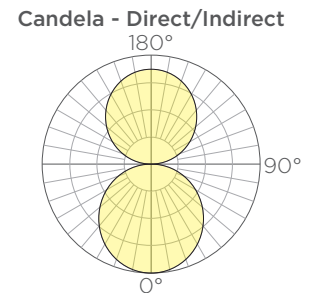


ORDERING GUIDE: EXAMPLE: AURA-SQR-D/I-2x2-L35HO-S6-CE-STD



1	Series Aura	4	Size 1' x 4' 1' x 6' 2' x 2' 2' x 4' 2' x 6' 2' x 8' 3' x 3' 3' x 6' 4' x 4' 4' x 8' 5' x 5' 6' x 6'	5	CCT 2700K 3000K 3500K 4000K	7	Wood Finish See color options on finishes technical sheet
2	Series SQR RCT	3	Lighting Direct/ Indirect	6	Output Standard Output Medium Output High Output	8	Mounting Ceiling Canopy
3						9	Special Standard Modified


1. Lumen output based upon 3000K CCT.

Aura Square and Rectangle - Wall Mount

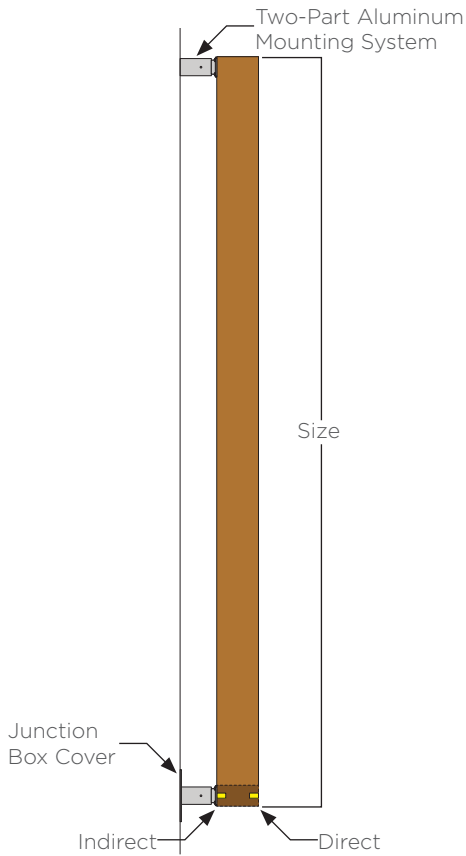

Size	Standard Output		Medium Output		High Output		Weight
	Watts D	Watts D/I	Watts D	Watts D/I	Watts D	Watts D/I	
1x4	15	28	30	56	50	94	26lbs.
1x6	21	40	42	80	70	134	35lbs.
2x2	12	22	24	44	40	74	21lbs.
2x4	18	34	36	68	60	114	31lbs.
2x6	24	46	48	92	80	154	40lbs.
2x8	30	58	60	116	100	194	50lbs.
3x3	18	34	36	68	60	114	31lbs.
3x6	27	52	54	104	90	174	45lbs.
4x4	24	46	48	92	80	154	40lbs.
4x8	36	70	72	140	120	234	59lbs.
5x5	30	58	60	116	100	194	50lbs.
6x6	36	70	72	140	120	234	59lbs.

Candela - Direct/Indirect

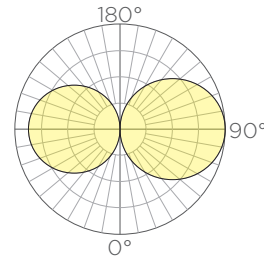

ORDERING GUIDE: EXAMPLE: AURA-SQR-I-4x4-L3050-S3-C2-WA4-STD



AURA									
1	2	3	4	5	6	7	8	9	10

1	Series Aura	4	Size 1' x 4' 1' x 6' 2' x 2' 2' x 4' 2' x 6' 2' x 8' 3' x 3' 3' x 6' 4' x 4' 4' x 8' 5' x 5' 6' x 6'	5	CCT L27 2700K L30 3000K L35 3500K L40 4000K	8	Metal Finish **** See color options on finishes technical sheet Custom Color
2	Series Square Rectangle	3	Lighting Direct Indirect Direct/ Indirect	6	Output Standard Output Medium Output High Output	9	Mounting WA4 4" Wall Mount WA8 8" Wall Mount
3	D I D/I			7	Wood Finish S* See color options on finishes technical sheet	10	Special STD Standard MOD Modified