

Reverse Tilt Bollard

Illuminated Aluminum Bollard

FIXTURE TYPE: _____

PROJECT NAME: _____



Tilted aluminum bollard with linear LED lighting matching the base details of the Reverse Tilt pole.

FEATURES:

- Smooth, dot free lumination
- Integral power supply
- Multiple static color options and color changing RGB available

SPECIFICATIONS:

CONSTRUCTION: Rectangular extruded 6061-T6 aluminum alloy tubes fastened to square 6061-T6 base support welded to 319SR aluminum alloy baseplate.


FINISHES AND MATERIALS: Metal pole shafts and base casting are polyester powder coat painted.

ELECTRICAL: Powered by a 90-305VAC primary/24VDC secondary integral power supply. System is 0-10V dimmable. Constructed with a US and Canada UL listed luminaire.

HARDWARE: All hand hole fasteners and luminaire bracket arm hardware are stainless steel. Anchor bolt kits are ASTM F1554 grade 55 steel with galvanized steel hex nuts and washers.



LED	Standard Output		Medium Output		High Output	
	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts	Lumens ⁽¹⁾	Watts
Front	306	5	561	9	833	15
Back	306	5	561	9	833	15

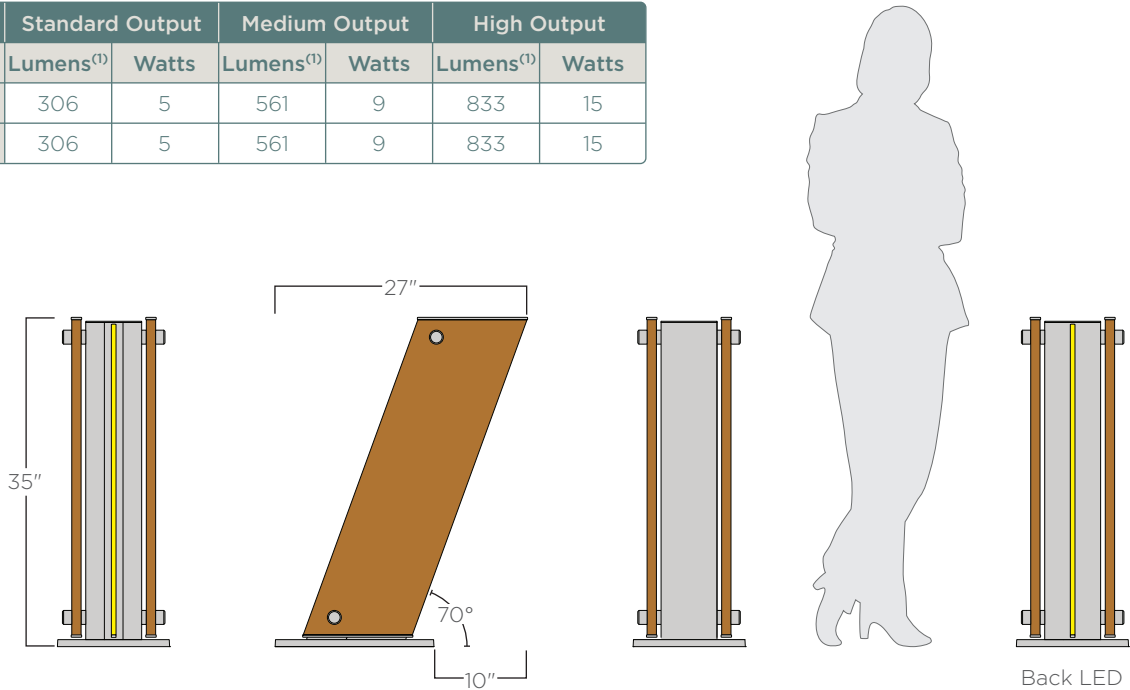

ORDERING GUIDE: EXAMPLE: REV TBL-35-C4-L30MO-UBSO-P1/S4-120-STD

REV TBL	35						UNV			
1	2	3	4	5	6	7	8	9	10	11

1	Series	5	Light Source⁽³⁾	9	Voltage
REV TBL	Reverse Tilt Bollard	SO	Standard Output	UNV	120-277V
2	Overall Height	MO	Mid Output	10	Options
35	35"	HO	High Output	GFCI	GFCI Box ⁽⁵⁾
3	Metal Finish	6	Back LED	11	Special
C*	See color options on finishes technical sheet	U0	No LED	STD	Standard
CSM	Custom Color	UB	Back LED	MOD	Modified
4	Light Color	7	Back Light Source		
L27	2700K	SO	Standard Output		
L30	3000K	MO	Mid Output		
L35	3500K	HO	High Output		
L40	4000K	8	Panel Material		
AMB	Amber	P1/S*	Wood (specify color) ⁽⁴⁾		
RED	Red	P2/C*	Aluminum (specify color) ⁽⁴⁾		
GRN	Green	WS	Weathering Steel		
BLU	Blue				
RGB	Color Changing ⁽²⁾				

1. Lumen output based upon 3000K CCT.
2. Consult factory for RGB color control options.
3. Leave output blank for amber, red, green, blue, and RGB light color options.
4. See color options on finishes technical sheet.
5. GFCI box option lowers lumen output of back side LED option.